

BLUEWIN Co., Ltd. a Family Group, EPC Turnkey company for Sludge Dewatering, Reduction, Recycling,

Sludge Dewatering, Reduction, Recycling Water, Wastewater, Algae Treatment, Utility, Devices, Equipment, System.

"Advanced Technology for Better Tomorrow"

Advanced Green Solution For Water, Wastewater and Sludge Treatment 35 years Field Know-how

Version 2021/Jan





► Introduction,

BLUEWIN is EPC Turnkey Family group for Water, Wastewater and Sludge Treatment. Based on 35 years field experiences in worldwide work-sites, we focus on sharing our advanced technologies and moving forward to clean earth environment for global society.

Main Equipment,

- 1. ELODE : Advanced Solution for Sludge dewatering by Electro-osmosis
- 2. KOWATS : Mechanical Sludge dewatering with 1,000 operating, 3,000 work-sites
- **3.** Nano Micro-bubble Technology: for Water, Wastewater, Algae purification.
- 4. 3P Separation : Separating Oil, Water, Solid at once for achieving renewable energy



• Refer to last page for detailed information.





1st CHAPTER : FINE-ELODE: Electro Osmosis Dewatering Equipment

2nd CHAPTER :

MECHANICAL DEWATERING: Decanter-Centrifuge, Screwpress, etc

3rd CHAPTER :

NANO MICRO BUBBLE: Water, Wastewater Algae Purification

4th CHAPTER :

2.3P-SEPARATOR: Achieving Sludge renewable by Oil Separation



1st CHAPTER : FINE-ELODE: Electro Osmosis Dewatering Equipment









Remarkable Sludge Dehydrator

- > NO Competitor in the World!
- > 10%wt (90%ds) Guarantee (For most of WWTP Sludge)
- > 0.45kWh/liter water removed (Lowest Energy Consumption)
- > 12months Recovery of Investment (Faster ROI)
- World Lowest Operating Expenditure
- > World Lowest Capital Expenditure





Click to watch ► "2021 ELODE Promotion Video"



We were selected World class 300 of South Korea in 2015 awarded U\$20mil Export Monument 2018.



 Click to watch
 "Full Operation of
 BELTPRESS + FINE-ELODE" (Old version)





Remarkable Dewatering system 90% Volume Cut-Down Reborn to Renewable Energy

<1st Stage Dewatering>

Belt press, Centrifuge, Filter press, Screw press, Volute press, Other mechanical dewatering M/C



35 years Know-How for Sludge Dewatering

<2nd Stage Dewatering> FINE-ELODE






FINE-ELODE = Electro Osmosis Dewatering Equipment

: The world first "Field Proven" commercialized electro-osmosis dewatering machine which treat almost all types of Organic wastewater.

Sludge Types All kinds of Organic Sludge

- Municipal Sewage
- Food & beverage
- Livestock
- Dyeing & painting
- Chemical
- Fishery
- Etc.

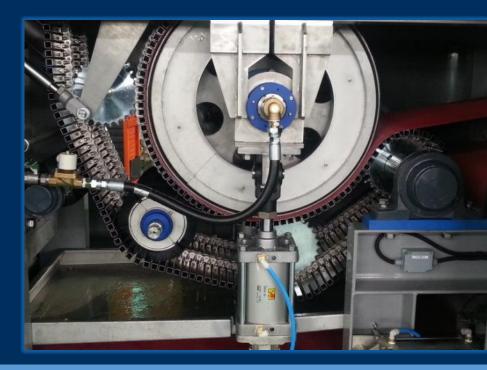





ELODE provides <u>Total solution</u> for the deficiency of current treatment.

1. Mechanical Dewatering machine

- Only extract the free water contained in the sludge.
- Dehydration limited to Avg. 25%DS of sludge.
- Cannot extract the remaining of absorbed water.

2. Thermal Dryers


- High capital
- **High energy consumption**
- **Lots of Utilities**

ELODE

- **1. Extract Both Free & Absorbed water**
- 90%DS Guarantee
 Reduce Sludge weight in half
- 2. Low Footprint & Energy consumption
- Small Space for Full Operating Process
- 0.45kWh removing 1L water
- Simplification of Utilities
- -> 12months ROI recovery (South Korea)

FLOW SHEET : How to get 90%ds



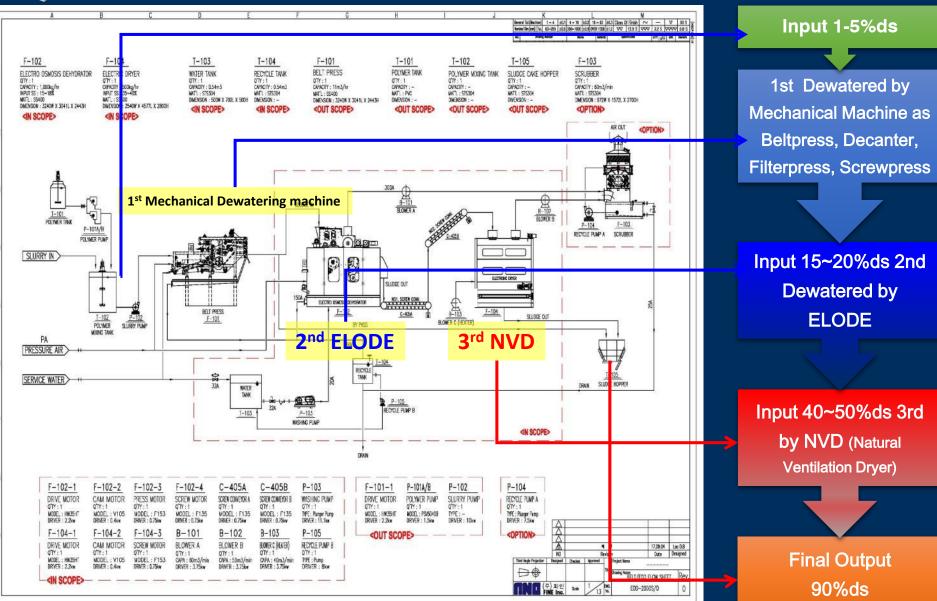



Combinated dehydration of ELODE + NVD achieves 20% > 90%ds with only 0.45kWh.

2nd Stage : ELODE : 20%ds ► 40%ds

- Electro-phoresis, osmosis and dialysis are applied to inlet sludge.
- By Electric potential difference, Cell membrane is destructed.
 In the process, 60~80°C heat is generated inside sludge.
- Absorbed water is discharged.

* Details on the next page

3rd Stage : NVD : 40%ds ► 90%ds

- NVD uses heat from ELODE by ventilating the sludge with natural air.
- Blower takes outside air and Electronic dryer can assist with low-energy.
- Moisture evaporates to the maximum and 90%ds Cake is achieved.


* Details after ELODE process





Dewatering Method

- Combined actions of electrophoresis and electro-osmosis
- The sludge cake first goes through bet ween the anode Drum and the cathode Carbon.
- Apply 3-phase DC voltage between the two electrodes, strongly push the sludg e particles (-) toward the anode and water (+) toward cathode.

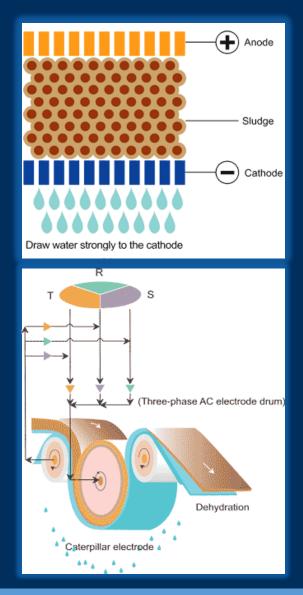





Electro-Osmosis Process FINE-ELODE

- 1. Early Electro-Osmosis, Electrophoresis
- Strongly push sludge particles (-) to anode (+) by an electrical potential difference



 Dehydration through movement of water (+) to cathode (-)

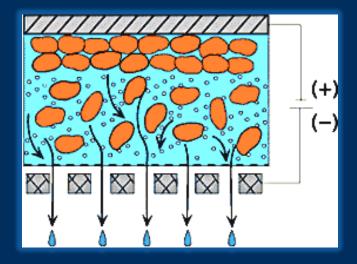

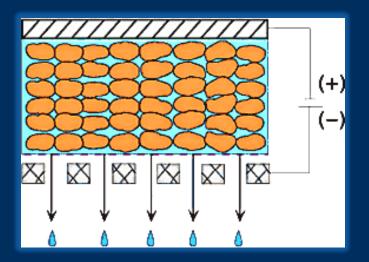





Electro-Osmosis Process FINE-ELODE

- 3. Final Electro-Osmosis Capillary Pressure
- Force the absorbed water flow through porous solid to cathode (-)

Destruction of Cell Membrane


 Destruction of cell membrane discharge the absorbed water of sludge

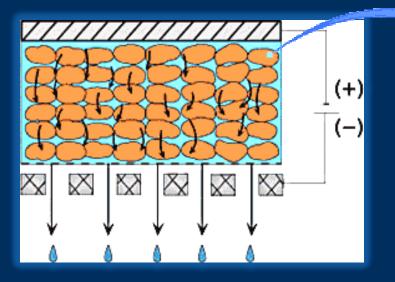

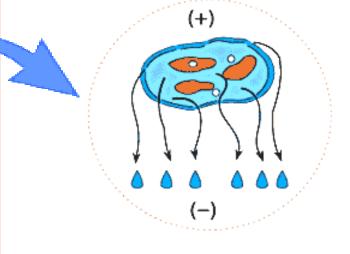





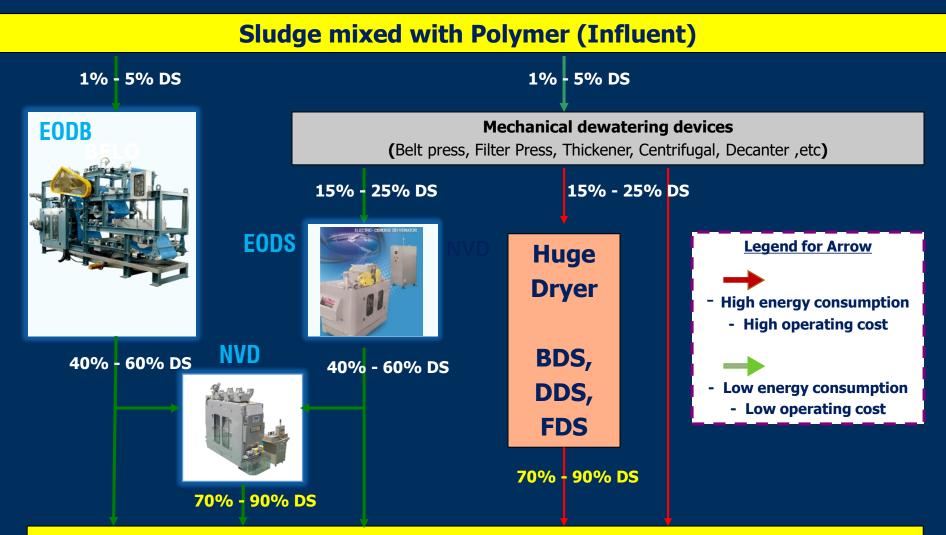

For final disposal-Incineration, Agriculture, Landfill, Renewable Energy etc.,





NVD = Natural Ventilation Dryer

: NVD is a compact dryer for ELODE that can maximize sludge dryness. It spends low energy using natural air and electronic heating system.

The water molecules in the sludge consist of polar molecules.	The water molecules by the electric field are rearranged.	Moisture evaporates by natural convection.
[Hydrogen] – [atom-positron] [Oxygen atom] - [negative electron]	Heat is generated by collision between rotating water molecules.	Water evaporation is maximized without additional energy.

Specification

Capacity : 355liter/hr evaporated at 155kW only. Dimension (m) : 5.4 x 3.6 x 2.6 (L x W x H of Largest Model) Small supplementary Equipment for Odor & Dust required If needed, Scrubber for Deodorization can be provided.

<u>Typical Concept of Full-Process</u>

· Case 1

Sludge Weight : 3200m³/day @ 1.1% TS (=99% WT)>>150m3/hr @ 1.1%TS 22h/daySludge Characteristic : Activated Sludge of Municipal SewageTotal Sludge Weight Reduction : 98.76%Operating Time : 22hr/day 365day per yearTotal Energy Consumption : 2,515kWh

Pre-Stage	1 st Stage	2 nd Stage	3 rd Stage
2 SET	2 SET	6 SET	6 SET
TWIN DRUM THICKENER (KOWATS-1000SDT)	DECANTER CENTRIFUGE (KOWATS-610D)	Electro Osmosis Dewatering Equipment (EODS-3000)	Natural Ventilation Dryer (NVD-3000)
150m3/hr @1.1%TS ▶ 42m3/hr @4%DS	42m3/hr @4%DS ▶ 7.63m3/hr @22%DS	7.63m3/hr @22%DS ▶ 4.20m3/hr @40%DS	4.20m3/hr @40%DS 1.86m3/hr @90%DS

- 150m3/hr 1.86m3/hr = 148.14tons of water removed (98% Weight Reduction)
- Electricity Consumption for Main Equipment & Utilities = 2,515kWh
- Energy / Evaporated water = 2,515kWh / 148,140L = 0.017kWh/1Liter removed
- <u>17kWh / 1m3</u> Water removed

<u>Typical Concept of Full-Process</u>

Check Details of MODEL Specification & References

Breakdown for Energy Consumption

APPLICATION	MODEL	ENERGY CONSUMPTI ON	Q'ty	TOTAL CONSUM PTION	REMARK
MAIN EQUIPMENT	TWIN DRUM THICKENER KOWATS-1000SDT	6	2	12	4%TS Guarantee
	DECANTER-CENTRIFUGE KOWATS-610D	73.5	2	147	22% DS Guarantee
	ELODE EODS-3000	200	6	1200	40% DS Guarantee
	NATURAL VENTILATION DRYER NVD-3000	155	6	930	90% DS Guarantee
	DEODORIZATION SYSTEM SCRUBBER DDSE-3000 for ELODE	15	2	30	<option></option>
	DEODORIZATION SYSTEM SCRUBBER DDSN-3000 for NVD	37.5	2	75	<option></option>
UTILITIES POLY DOSING, SLUDGE TRANSFER, etc.					
GRAND TOTAL ENERGY CONSUMPTION INCLUDING OPTION				2	,620kWh

<Notes>

Energy consumption is Maximum Value including Safety Factor.

Actual Operating energy is less than 2,620kWh.

Performance Photo only by ELODE



Result of Final Cake Out from different sludge.





Chemical Sludge 53%wt



City Bio Sludge 55%wt

Livestock Sludge 52%wt

Municipal Sludge 57%wt

High Organic Dyeing 48%wt

Municipal + Excreta 51%wt







<u>Performance Photo only by ELODE</u>



Result of Final Cake Out from different sludge.



Industrial Oil Sludge 52%wt



Soy Bean Sludge 53%wt



Organic Mineral 55%wt

Pharmaceutical Sludge 48%wt



Milk Sludge 58%wt



Human Excreta 43%wt





2nd CHAPTER : MECHANICAL DEWATERING: Decanter-Centrifuge, Screwpress, etc





Over 70% WWTP Market Share in Republic of Korea

- 1. 35 years Accumulated know-how for Performance & Safety
- 2. Over 3,000 units, 1,000 work-sites References
- 3. Top quality A/S for Professional Engineer departure within <u>24hours</u> from emergency call










Click


For detailed Specification, please refer to <u>KOWATS_CENTRIFUGE</u> Centrifuge, Screwpress, Filterpress, Thickener, etc. are introduced.

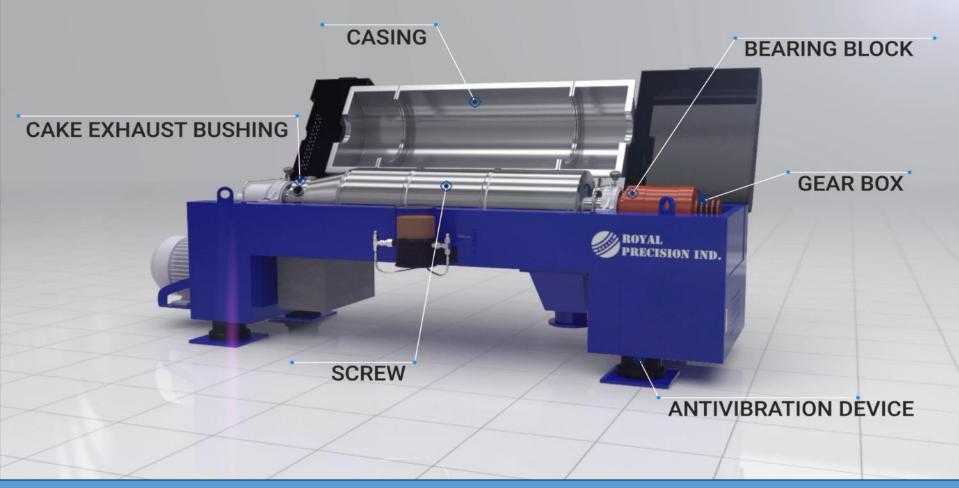



Centrifuge installation for dewatering of sewage sludge

PROCESS MAP

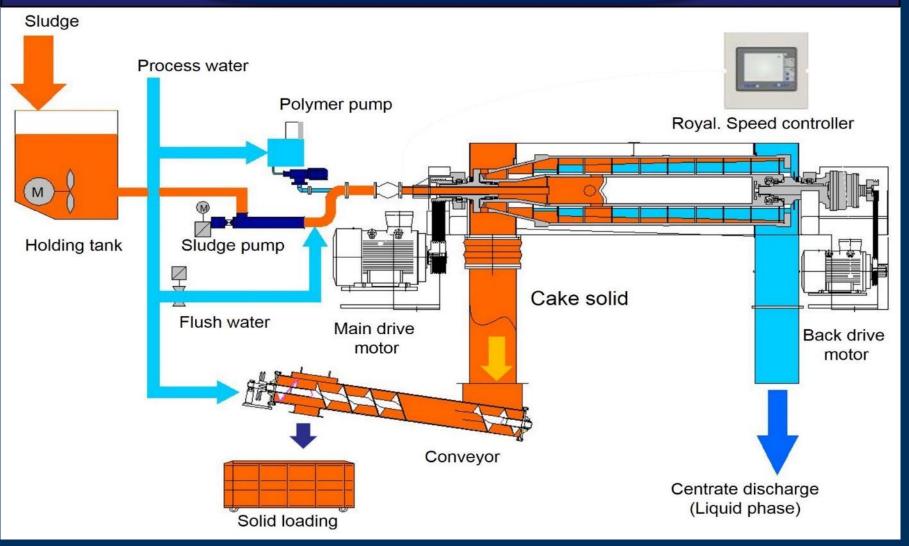











SORT	NAME OF PATENT	REGISTERED NO.
	Screw conveyor for screw decanter type centrifuge with detachable screw wings	#10-1081751
	Centrifuge with multistage controller dam plate	#10-1068577
	With a two-stage accelerated discharge cover formed in a screw conveyor Screw Decanter Type Centrifuge	#10-0977196
	A concentrate having a rotation angle or a cake outlet Screw Decanter Type Centrifuge	#10-0953671
TECHNICAL PATENTS	A screw decanter type centrifugal separator equipped with a plate for noise prevention on the rotating body of the outer shell bolt	#10-0920493
	Centrifuges for industrial, sewage and wastewater treatment Wing end surface hardening method of screw conveyor	#10-0857057
	Horizontal centrifuge for sludge concentration and dehydration	#0407896
	Acceleration / deceleration gearbox unit for two-stage accelerating centrifuge	#0340190
	Automobile decelerators for centrifugal concentrators and dehydrators	#0302832
	Mechanical concentration and dehydrator by centrifugal force	#0251596
UTILITY PATENTS	Screw conveyor of decanter type centrifuge consisting of injection nozzle with directional spray angle	#20-0459173

High-Volume Screwpress



Main Feature

- High-efficiency
- · Auto-Washing system
- · Semi-permanent durability
- Option : Combined type with thickener

Specification

Main Motor: 5.5kWh Sub Motor; 2.2kWh Throughput: 30m3/h SS: 2.5~3% Municipal Sludge Bowl Diameter: 900mm Dry Solid: 22~25% Operating in Korea







3rd CHAPTER : Nano Micro Bubble: Water, Wastewater, Algae Purification



Portable Skid type 100m³/day






Top-rank Nano Micro-Bubble System in Republic of Korea For <u>Water, Wastewater, Sewage, Algae</u> Purification

- 1. Non-powered Flocculation : Minimize energy cost
- 2. 2-Stage Coagulation & Flocculation with High capacity
- 3. Reduce 20% of Chemical input than Conventional Micro Bubble
- 4. Generate No Odor with In-line Type
- 5. Treat 96m³/hr of Municipal Sewage



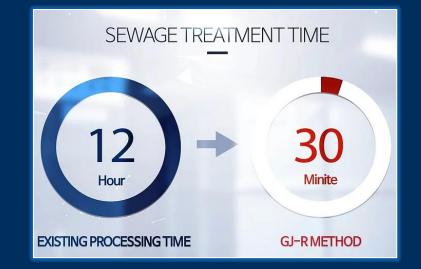

<u>Click to</u> watch Videos





Diagram of technology


Non-powered floc coagulation device (Patent 10-1369975) Contaminant condensation using vortex Water treatment system including Ozone treatment device (Patent 10-1835271) **Flocculation device** Of several steps Skimmer **Ozone Reactor** Water level Control ware Primary Secondary Tertiary 1st Bubble Reactor Flotation Reacto Bubble Reactor loatation Treated Water Sludge artition wa Return Water **2st Final** Treated Water Aulti stage bulkhead type flotation system (Patent 10-1362858) ticro bubble High speed floatation separation of contaminants using microbubbles Generator Outflow Drainage of Sedimentation pond Sludge drawing Ozone Generator Inflow **Rapid Coagulation** Device of spiral


Swirling vortex type fast condensation device(Patent 10-1369979) High speed condensation of pollutants

Vortex Flow type

Coagulation & Flocculation



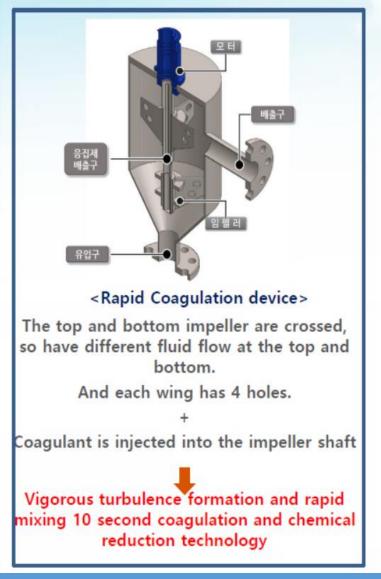

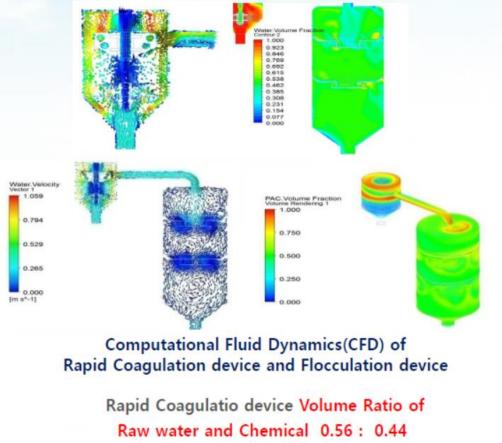

Flocculation device 0.5 : 0.5(green)

Admixture Efficiency Nearly 100%

(General mixing efficiency less than 70%)







< Coagulation >



< Out flow >





< Micro-bubble Floatation >



< Ozone Treatment >

Operating Site



International joint localization project(Indonesia)

- Purpose : Movable drinking water supply to the world's Largest market
- Capacity : 100Ton/Day(Maximum 600 people drinking water supply)
- Period : 2016. 12 ~ 2018. Currently
- Budget required : U\$ 600,000
 (Environmental industrial technology institute 70% and Enterprise 30%)

 Place of installation : Indonesia Jakarta PDAM











International joint localization project (Indonesia)

Rapidity water Treatment



< Contaminated River (Jakarta) >



< GJ-R Process>

HASIL ANALISA AIR

OTIVICAL LUVING ST

JENIS SAMPLE NACE.

aetra

TANGGAL PENERIMAAN BAMPLE TANGGAL PENGLURAN SAMPLE

1.18 4411 3917 1 48 JUN 2017

FEUSHING / COMPLAINT / INVESTIGASE / SAMPEL BARD

TERANGAN	i

and the second se				HAD'L MINLIDA		BTANDAR AR	
100.00	New.	PARAMETER	GATUAN	11	32	49.9/904.0	METODE
And A Lot of Concession of Conce	1	Turtesty	NTU	0.954	0.226	0	SNI 06-6969 25 200
	2	T Coliform	no/108ml	0	0	0	1HQ40 1 B/0665
1	3	E coli	rig/100ml	0	0	0	110/018/06/6
		Conductivity	mp4.	372	366		SNI 06-6989.1 2004
The second se	5	Chioride	mpR.	65.28	61.78	250	SMI 6969, 15 : 2009
	6	Colour	TEU	1.000	3.497	15	SALE 6009-00 - 2011
	7	TUS	mg/L	229	229	000	16/0316/0710
		Organic Matter	mg/L	3.25	42.32	10	0N0 00-0080 22 : 200
	3	Total Hardstein	mg/L	97.40	902.53	500	SNE 00-0060-12 : 255
Treatment water : 0	100	-0.9NTU	mg/l.	0.079	~0.010	0.8	ONE 6969.1 2009
ndonesia Water Stan				0.048	0.019	0.4	See mage 0 3004
nuonesia water stan	पत्ना	US IN	U for	-42	41	299	IK/O LENDER
1 -	1.8	Nitrito-NO ₂	mgit.	8.915	0.000	а	16/018/002
	14	Temperature #	°0	27.4	22.9	SLAN, LIGHTLY & IFC	0570 101000
a e	9.5	D++ W		6.87	7.34	0.0 + 0.0	14(7) 14(079)
	10	Free Childrene #	mgn	15.003	= 05		evenerate e

Air yarra sharrafa dan tangat aatalah maan the marker / provider mailer

< Raw water, Treated water >

< Satisfy of Indonesia drinking water standards >

Operating Site

<u>Check OPEX</u> <u>Comparison Data</u>





- Capacity: 1,000Ton/Day
- Start Operation : 2017. 7. 1 ~
- Site : In Daehyun sewage treatment plan
- Purpose : Post-treatment due to excess capacity and Sewage treatment during rainfall

• Water Quality : Operation average

Target	SS	BOD	COD	T-N	T-P	E-Coli
Inflow	20.4	24.0	15.5	8.24	0.75	174,400
Outflow	2.0	2.1	4.2	5.013	0.12	500
Efficiency	90.2	91.3	72.9	39.2	84.0	99.7





www.BLUEWIN.kr Sustainable growth enterprise

(Unit : mg/L)





Business	Application Field	Processing capacity	Progress Situation
Daehyeon-ri sewage treatment plant	Sewage	150Ton/day	Operation
Daehyeon-ri sewage treatment plant	CSOs and Filtration	1,000Ton/day	Operation
Imdang Station`s Sphere of influence wastewater reusing plant	Wastewater Reusing	120Ton/day	Operation
HallaSan 1100 hill resting place	Sewage	50Ton/day	Operation
Halla Yeongsil resting place	Sewage	100Ton/day	Operation
Daebon-3ri sewage treatment plant	Sewage	100Ton/day	Operation
Dongsan sewage treatment plant	Sewage	100Ton/day	Operation
Namyangju-si Jingun sewage treatment plant	Recycle Water	14,000Ton/day	18.05(Test Run)
J Industrial estate wastewater reusing plant	Wastewater Reusing	50Ton/day	18.04
Y-si sewage treatment plant	Sewage	100Ton/day	18.02
J-si resort treatment plant	Sewage	1,800Ton/day	18.07
Y-si waste leachate	Wastewater	200Ton/day	18.06
G-do Urban development corporation	Wastewater	50, 150Ton/day	19.07



4th CHAPTER : 2·3P-SEPARATOR: Achieving Sludge renewable by Oil Separation








80% Market share for Oil Separation in Republic of Korea

- 1. Developed the first commercialized 3P Separator in Korea.
- 2. Optimized machine design for <u>Heavy oil, Food, Palm oil Sludge</u>, etc.
- 3. Top quality A/S for Professional Engineer departure within <u>24hours</u> from emergency call

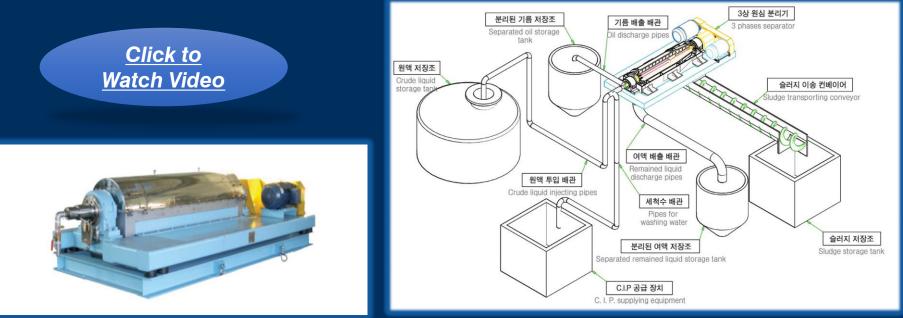

3Phase Technology



The Concept of Centrifugal Separation


If the floating particles included suspension is left and observed in the air for the time being, bigger mass particles will move to downward and the lighter mass particles will move to upward slowly, and this upward & downward movement is called as precipitation.

If the centrifugal force is applied intentionally on this natural state suspension, precipitation phenomenon of the particles can be accelerated and the centrifuge can be defined as the machine that can separate, refine, enrich and dehydrate the property of matters using this centrifugal force and precipitation phenomenon.

The Concept of 3 Phase Centrifugal Separation


2 phase centrifugation is normally recognized as the typical centrifugation and it mainly separates solid and liquid using centrifugal force.

However, our 3 phase can separate and discharge the matters in 3 different phases such as Solid, Light Liquid and Heavy Liquid.

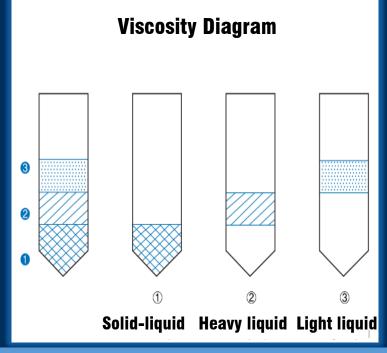

<u>3Phase Technology</u>



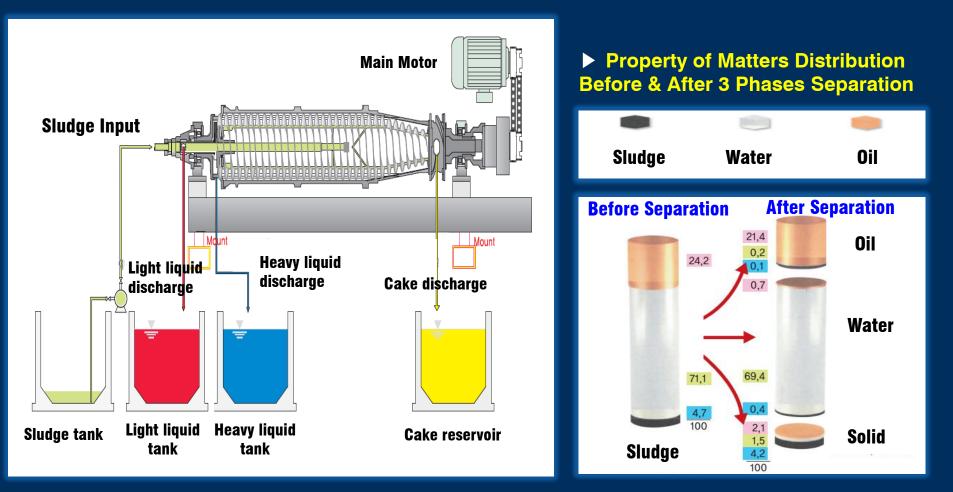

Property ratio of matters before and after the separation is different depending on the properties of the mixtures.











3P Separator

3P Separator

2P Separator



2P Separator



Disc-type Separator



Peeler-type Separator







Peeler-type Separator



Peeler-type Separator



Low-speed Separator





Oil Heating System

Low-speed Separator

Oil Heating System



COMPANY SUMMARY PROFILE, REFERENCES, CONTACT LIST





Group Company Name	BLUEWIN, FINE INC, ROYAL PRECISION IND. CO., LTD.		
	Mr. LEE SANG JUN(Korean)/CEO & President		
BOM	Mr. PARK JAE DUCK(Korean)/CEO & President		
	Mr. ANTONIO KIM (Korean)/CMO, CEO		
Established	SEPT, 15, 1989		
Main Item & Business Fields	- ELODE & KOWATS : World Unique Sludge Treatment system for Dewatering,		
	Reducing, Recycling, Renewable from 1% to 90%DS.		
	- Nano Micro-bubble : Advanced System for Water & Wastewater purification with		
	the shortest time, lowest cost and highest efficiency.		
	- 3-phase separation : Achieves Renewable energy by separating Water, Solid, Oil		
	of "Palm oil, Heavy oil, Food Sludge, etc" with precision and efficiency.		
Marketing Headquarters	4F, Baeksan Bldg, #157, Jungnung-ro, Seongbuk-Gu, Seoul, KOREA		
Capital Fund	US\$3.2mil	Turnover	US\$75.6mil/ Ave for 3years
Employee	181 staffs / 2021' present		
Official line	Tel: +82.70.7868.8920 / Fax: +82.2.912.4438		
	E-mail: info.bluewinkorea@gmail.com / www.BLUEWIN.kr & www.ELODE.co		





Setting day-Validity Period :Jan/01/2018~Dec/31/2020

Financial standing for past 3years

- Int'l Credit standing: BBB-
- Cash Flow : CF2(B)
- Turnover: U\$75.6mil/year ave.

Bank Information

- Industrial Bank of Korea
- KOREA.

Credit Rating Authorized Agency :







ARTICLES	AUTHORIZED BY	REGISTERED NO.
R&D CENTER	KOREA INDUSTRIAL TECHNOLOGY ASSOCIATION	#20084189
WORLD CLASS PRODUCTS	MINISTRY OF KNOWLEDGE ECONOMY	#2008-310
GREEN TECHNOLOGY	MINISTRY OF ENVIRONMENT	#GT-12-00173
INNOVATIVE S.M.E (INNO-BIZ)	SMBA	#R2021-524
IS09001 QUALITY MANAGEMENT SYSTEM	SMBA CENTER	D 152-211
ISO14001 ENVIRONMENT MANAGEMENT	CRS	EMS-0080
LEADING COMPANY FOR MACHINERY PARTS & MATERIALS PARTS	MINISTRY OF KNOWLEDGE ECONOMY	#6801
BUSAN-LEADER FOR MACHINERY PARTS & MATERIALS PARTS	BUSAN METORPOLITAN CITY	#2006-2-89
FINANIAL A+ MEMBER CLUB	TECHNICAL ASSURANCE FUND (KOREA GOVERNMENT)	#836
CE	TUV	KPA 58161
DESIGNATED AS A DEFENSE COMPANY	MINISTRY OF KNOWLEDGE ECONOMY	#196
DEFENSE QUALITY MARK	DEFENSE TECHNOLOGY and QUALITY AGENCY	DTaQ-CDQ-13







① SEOUL-CITY MARKETING HEAD OFFICE / ② BUSAN-CITY FACTORY ③ DAEGU-CITY FACTORY / ④ ULSAN-CITY R&D CENTER







(5) Exclusive Production Factory For <u>ELODE</u> in BUSAN-CITY

Exclusive Production Factory For <u>Decanter-Centrifuge</u>, <u>Screwpress</u> In DAEGU-CITY







BLUEWIN CO., LTD

e-mail	info.bluewinkorea@gmail.com	www.bluewin.kr www.elode.co	
Person in charge	Moon KIM Assistant Manager of Overseas Business	Office +82.70.7868.8920	
We're ready to reply within 24 hours for Serving you.			

CONTACT ID Whatsapp: +82 10 6236 3127 Wechat: manchch Kakaotalk: manchch