

An Analysis of Fluoride Contamination in Global Groundwater

Dr. Amartya Kumar Bhattacharya

BCE (Hons.) (Jadavpur), MTech (Civil) (IIT Kharagpur), PhD (Civil) (IIT Kharagpur),
Cert.MTERM (AIT Bangkok), CEng(I), FIE, FACCE(I), FISH, FIWRS, FIPHE, FIAH, FAE, MIGS,
MIGS – Kolkata Chapter, MIGS – Chennai Chapter, MISTE, MAHI, MISCA, MIAHS, MISTAM,
MNSFMFP, MIIBE, MICI, MIEES, MCITP, MISRS, MISRMTT, MAGGS, MCSI, MIAENG, MMBSI,
MBMSM

Chairman and Managing Director,
MultiSpectra Consultants,
23, Biplabi Ambika Chakraborty Sarani,
Kolkata – 700029, West Bengal, INDIA.
E-mail: dramartyakumar@gmail.com

Amardeep Sil

Intern,
MultiSpectra Consultants,
23, Biplabi Ambika Chakraborty Sarani,
Kolkata – 700029, West Bengal, INDIA.
E-mail: amardeepsil1994@gmail.com

Dr. Rajashree Lodh

BE (Civil) (TIT, Tripura), ME (Civil) (BESU, Shibpur), PhD (Civil) (IIT Kharagpur)
Assistant Professor,
Heritage Institute of Technology,
Kolkata, West Bengal, INDIA, and
Post-Doctoral Researcher,
MultiSpectra Consultants,
23, Biplabi Ambika Chakraborty Sarani,
Kolkata – 700029, West Bengal, INDIA..
E-mail: shree1504@gmail.com

Kumari Anshumala

Intern,
MultiSpectra Consultants,
23, Biplabi Ambika Chakraborty Sarani,
Kolkata – 700029, West Bengal, INDIA.
E-mail: anshumalakumari14297@gmail.com

ABSTRACT

Fluoride is a mineral that can be found in seawater, oceans, and groundwater which is the

main source of drinking water in many parts of the world and, therefore, is the main source of fluoride ingestion. Fluoride pollution in groundwater in the past few decades has gained significance, mainly because of its dual impact on living beings, i.e., the small intake of fluoride is necessary for teeth whereas the excess amount of it is consumed, then a very painful incurable disease called fluorosis occurs which directly affects the teeth, bones, and muscles. The risk of fluorosis increases with increase in the concentration of fluoride beyond 1.5 ppm. Several factors contribute to environmental and natural factors associated with high fluoride levels in the ground waters. Until now it has not received enough attention to this problem. The aim of this study was to assess the fluoride content and its contamination around the globe, and also methods of disposal and reuse of fluorides.

KEYWORDS:-Ingestion, contamination, groundwater, detection, measurement, fate, disposal, global fluoride data, fluorosis .

INTRODUCTION

Fluoride is a compound that is present in groundwater or any source of water in varying concentration in different locations. Fluoride ion (F^-) is generated from Fluorine which is available in ample quantity in nature. The source of fluoride in water is due to many reasons (*Fig 1.*) including Natural, Fertilizers, ceramics, bricks, and Ironworks (Gill, Tiwari and Kumar, 2014). Fluoride is added to the local water supply because it helps in the prevention of tooth decay. Fluoride forms a crystalline-like structure around the enamel which acts as a protective layer. Excess intake of fluorine during the infancy stage causes Fluorosis. (*Committee on Nutrition, 1986*). Fluoride is also used in Toothpaste for the same reason of protection of enamel from dental caries, but intake of the excess amount can be harmful hence parents are advised to keep a check on their children.

Skeletal Fluorosis is a kind of bone disorder also caused due to increase in fluorine intake. It doesn't happen for the concentration of fluorine below 1.4 ppm but chances of happening increases with the increase in concentration. (Jolly *et al.*, 1968). Thyroid stimulating hormone (TSH) Test is a blood test used to determine the working of thyroid hormones.

TSH is found to be in high quantity in people consuming a huge amount of fluoride contaminated water even when the concentration of fluoride is as low as 0.5 mg/l. (KheradPisheh *et al.*, 2018). Apart from that, a study done in some regions of America shows exposure of fluoride leads to harmful effect on fertility rate also. (Freni, 1994)

Fluoride is given as a supplement to the children in the area where the concentration of fluoride is nil or low. It is to be prescribed by the medical authorities in the area generally where fluoride concentration is below 0.3mg fluoride per liter. (Riordan, 1989). Fluoride varnish can be used in the prevention of dental caries and also help in the prevention of hypersensitivity in teeth. The main ingredient of Fluoride varnish is 5% of sodium fluoride. (Chu and Lo, 2008). Some countries have introduced fluoride salts to prevent dental problems. Fluorides are also used in mouth rinses (0.05 – 0.2 %) which are very famous among young children. Other uses of fluoride include gels, solutions, and floss which is used in Dentistry. Other uses of fluoride contain gels. Hydrogen Fluoride (HF) is an important component which is widely used in industrial purposes. Some of the purposes of HF includes etching semiconductor devices, cleaning bricks, cleaning, and etching glass, etc. (Environmental Health Criteria 227).

Filtration of fluoride from water leads to the generation of the huge amount of fluoride-rich wastewater which is ultimately dumped into the environment which is very harmful to the environment and the ecosystem. Nanomembrane based hybrid treatment is done at 5-16 bars of operating pressure and it's tested on the water having fluoride concentration for 17 mg/l in West Bengal and the efficiency of these filters are found to be 99%. But the important outcome from his study is that the sludge generated can be taken care of by stabilization. (Chakraborty *et al.*, 2016). The Bone char sludge generated from Nalgonda Technique can be partially used in for Construction purposes in place of the river sand or fine aggregate. The strength of the produced concrete doesn't degrade and this helps in reduction of sludge waste generated to the environment. (Rao *et al.*, 2009).

Fluoride wastewater generated can be used to prepare synthetic calcium fluoride which can be further utilized for the production of Hydrofluoric acid and also can be used in the metallic or ceramic industry. (Aldaco, Gareia and Irabien, 2007).

These methods ultimately help in the protection of the environment by reducing the

harmful effects of fluoride wastewater, which instead has to be discharged into the environment.

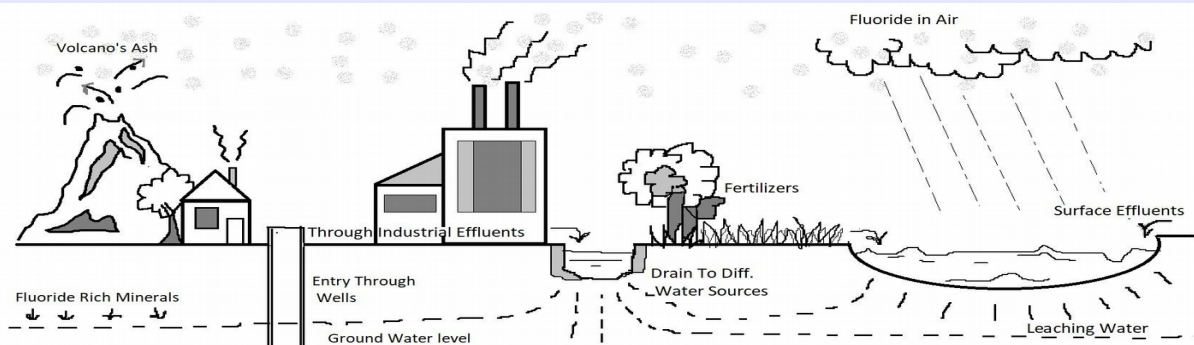


Fig 1. Different Sources for the introduction of Fluoride in Groundwater.

METHODS USED TO DETERMINE FLUORIDE CONTENT

The method which is widely used to determine Fluoride concentration in the groundwater sample is named as “ Colorimetric SPADNS (Sodium 2-(Parasulphophenylazo)- 1,8 - dihydroxy -3,6 - naphthalene disulfonate)”. Some other methods including Complexone method which is also extensively used method, methods using some sophisticated instruments like Ion Chromatograph in which Ion-selective electrodes are available to measure the concentration in the sample. This Ion selective method can be used in both Lab and Field.(Brindha et al., 2011)

SPADNS Spectrophotometric Method

The method is based on fluoride interaction with some zirconium dyes, which result in the formation of complex anion which is colorless and a dye are formed. As the fluoride concentration in the water sample is increased the complex formed during the interaction which is proportional to the fluoride content bleaches the dye and make it lighter.

There are also other compounds present in the water sample which is needed to be removed eg- distillation is preferred on the sample having the concentration of dissolved

solids higher than the amount which interacts with the result. Some other components also interfere with the water sample results such as Iron, Sulphonates and Alumina have a negative impact whereas Phosphate and Chlorine show positive impacts.

During the reaction of fluoride ion and Zr-SPADNS (Sodium 2-(Parasulphophenylazo)- 1,8 - dihydroxy -3,6 - naphthalene disulfonate), the complex compound which is obtained is a colored compound and is measured through a spectrophotometer of 570 nm. (*HP Hydrology Project, Training Module # WQ-36,2000*).

Ion Selective Electrode (ISE) Method

This is a method based on a potentiometric analysis method. Ion- Selective Potentiometry(ISP) is a kind of method after which the sample can be further used. This kind of method is categorized as Non-destructive method of evaluation. The electrical potential difference generated between a selective electrode and a reference electrode is calculated to determine the Fluoride content in water.

This method of Potentiometric determination using Fluoride electrode is most popular and this method is convenient because of its high sensitivity, low detection limit, and specificity. Over that this method is cheap, reliable and simple. This method is based on a physical characteristic, it does not involve the use of different chemicals and sample preparation a forehead of the test is also not required. (*Sunitha and Reddy, 2014*).

The electrode potential is determined by using the following formulae-

$$E=E^0 - (RT/nF) \ln Q$$

Where,

E = Potential difference.

E^0 =Standard Cell Potential.

Q = Ion Outside/ Ion Inside.

R,F = Constants.

T = Temperature.

n = Number of Electron.

Ion Chromatography

It is a method used to separate ions on the basis of their affinity to Ion Exchanger. For this purpose, the anion-exchange method is used to find Fluoride Ion concentration in the sample. The sample taken is a Seawater sample taken from Hokkaido, Japan. Fluoride Ion concentration can be identified using the Ion Chromatography and the analytical condition is kept for effective output includes a column of Ionpac AS20, having mobile phase as Potassium hydroxide with a flow rate of 0.25 mL/min, with column temperature of 35°C. The Instrument is used for Conductivity detection, ICS-3000 (Dionex Co. Ltd). It was found out that this method can be used to identify high Fluoride content in samples. (Miyake et al., 2007).

FLUORIDE CONTAMINATION AROUND THE GLOBE

ASIA

Sri Lanka

491 nos. of water samples were collected from 14 districts of Sri Lanka and were tested using Ion Chromatography method. The outcome from most of the test shows that sample have Fluoride contamination more than the country's average. Anuradhapura, a district in Sri Lanka was found to be the most affected region having maximum concentration of Fluoride to be 7.03 mg/l whereas Polonnaruwa and Badulla were found out to be the second and third most affected respectively after Anuradhapura, having maximum fluoride contamination of 3 mg/l and 2 mg/l respectively.

It was also found out that Chronic Kidney disease was maximum i.e. 87% in people living in Anuradhapura was due to fluoride contamination in water. (Weragoda and Kawakami, 2016).

India

Groundwater is one of the important sources of drinking water in many parts of India. In

Vijaypur (Bijapur) district of Karnataka, the water sample of 62 nos. of bores were tested and around 55% of the samples have fluoride content more than drinking permissible limit. (*Ugran et al., 2017*). Similarly out of samples tested from the other two districts namely Kolar and Tumkur is found out to have fluoride contamination in 76% of the samples tested. (*Mamatha and Rao, 2010*). Alleppey town which is situated in Kerala, in there, 16 nos. of samples were gathered. In this region of the state, groundwater is the main source for water consumption and after doing the tests, it was found out that 50% of water samples have poor water quality. (*Raj and Shaji, 2017*). Main concerned regions having a high concentration of Fluoride can be seen in (*Fig 2*). Also during similar testing done in parts of central Rajasthan, samples from 44 habitations were examined. Around 32% of individuals of these habitats do a Fluoride intake of more than 4 mg/day. That's enough to cause Fluorosis of first and Second degree. (*Hussain, Arif, and Hussain, 2012*).

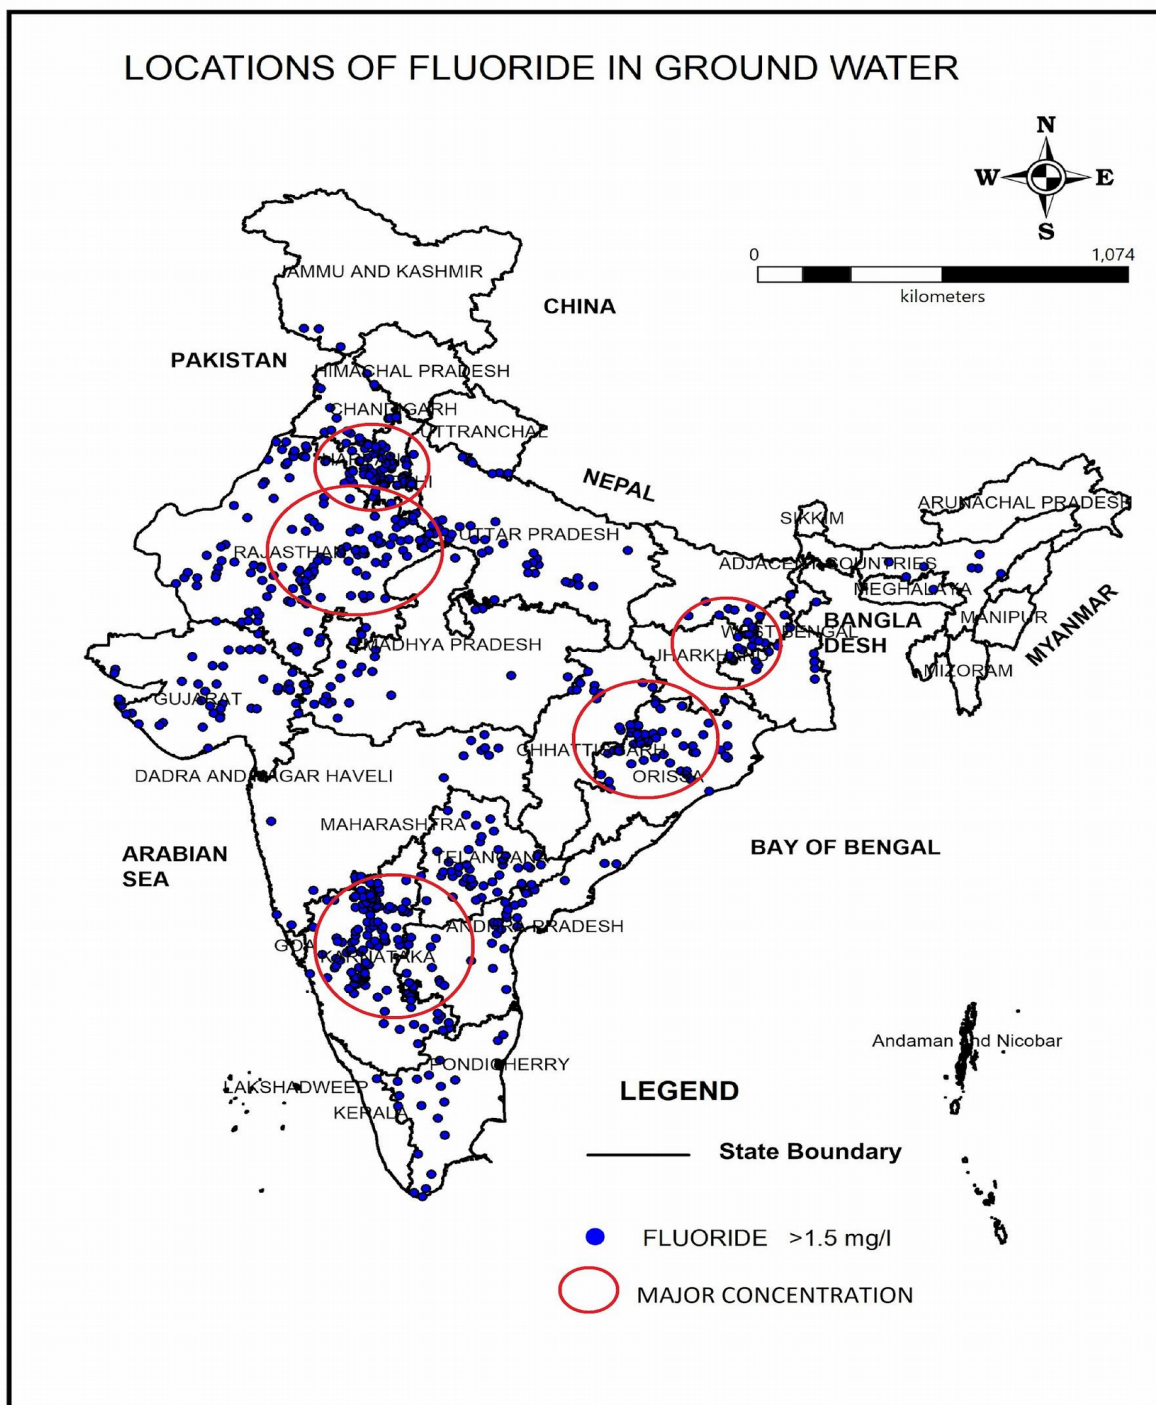


Fig 2: A Map of India showing a major concentration of Fluoride contamination in Groundwater. Website of Central Groundwater Board (Government of India), Fluoride map.

NOTE: Haryana, Rajasthan, West Bengal, Jharkhand, Chhattisgarh, Orissa, and Karnataka are the

states having a high concentration of Fluoride contamination.

China

It was found out that many regions of China, regions of North China's groundwater sources were mainly affected by Fluoride contamination. A survey was done in those areas and the results were daunting as it was also found out that 26 million people were affected with Dental Fluorosis and Around 1.7 million were affected by Skeletal Fluorosis and these numbers are likely to be increasing. Many of the sources identified across these regions (Fig 3) which were responsible for Fluoride contamination in these regions include Fluoride rich minerals leaching, Geothermal Fluoride fluids and Fluoride dissolution in groundwater having high HCO_3 concentration (Eq 1). (Wen et al., 2013).

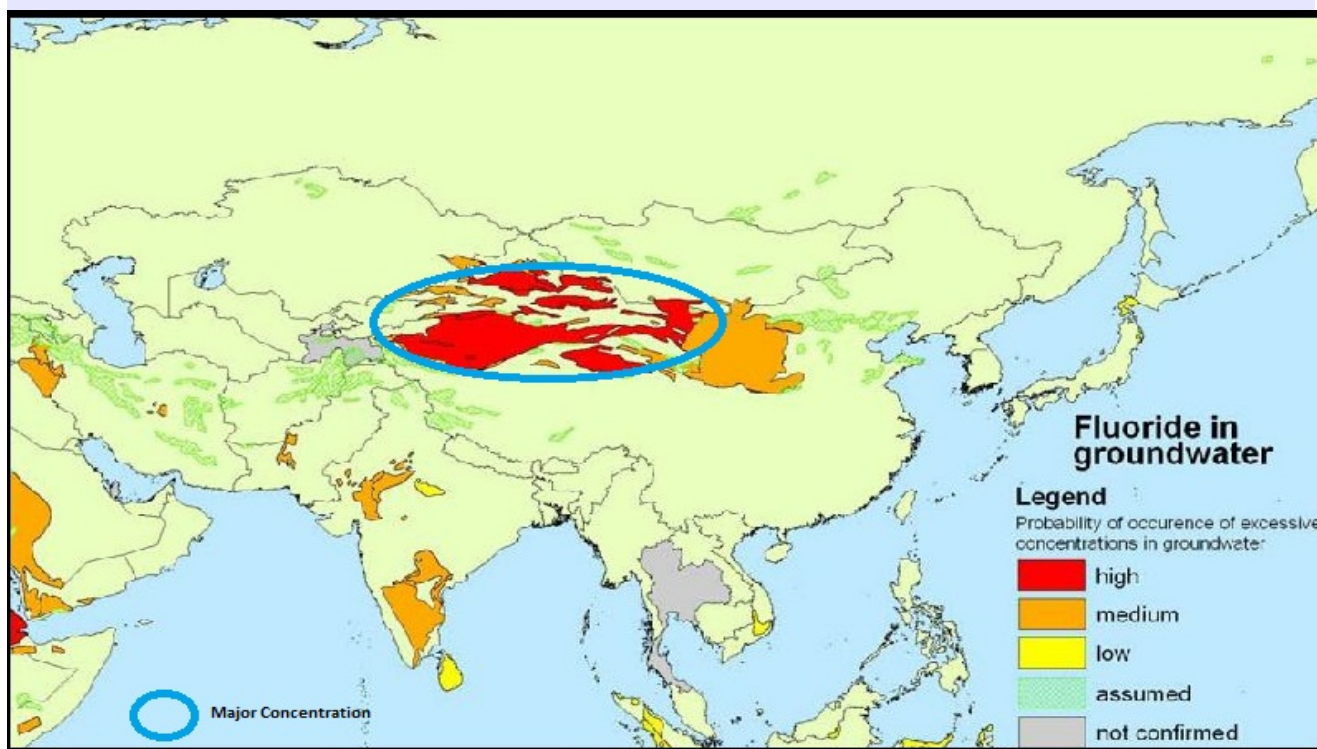


Fig 3: A Map of Asia showing a major concentration of Fluoride contamination in Groundwater. Website of International Groundwater Resources Assessment Centre - www.un-igrac.org

Iran

Due to many anthropogenic activities initially, the surface water was affected, but now groundwater is also not distinctive from that. Day-by-day the groundwater quality (Fig 4) is getting exacerbated. A total of 17nos. of the sample of groundwater was analyzed in lars, South Iran and it was found out that the fluoride concentration was ranging from 0.59 mg/l to 3.92 mg/l. Eastern part of Lars has more regions where the concentration can be found out to be around 1.50 mg/l. (Rezaei, Nikbakht and Shakeri, 2017). 24 nos. of samples collected from Tabriz, Iran was also analyzed and found out that fluoride concentration was ranging from 0.7 to 111.1 mg/l. (Vaezihir and Mohammadi, 2016)

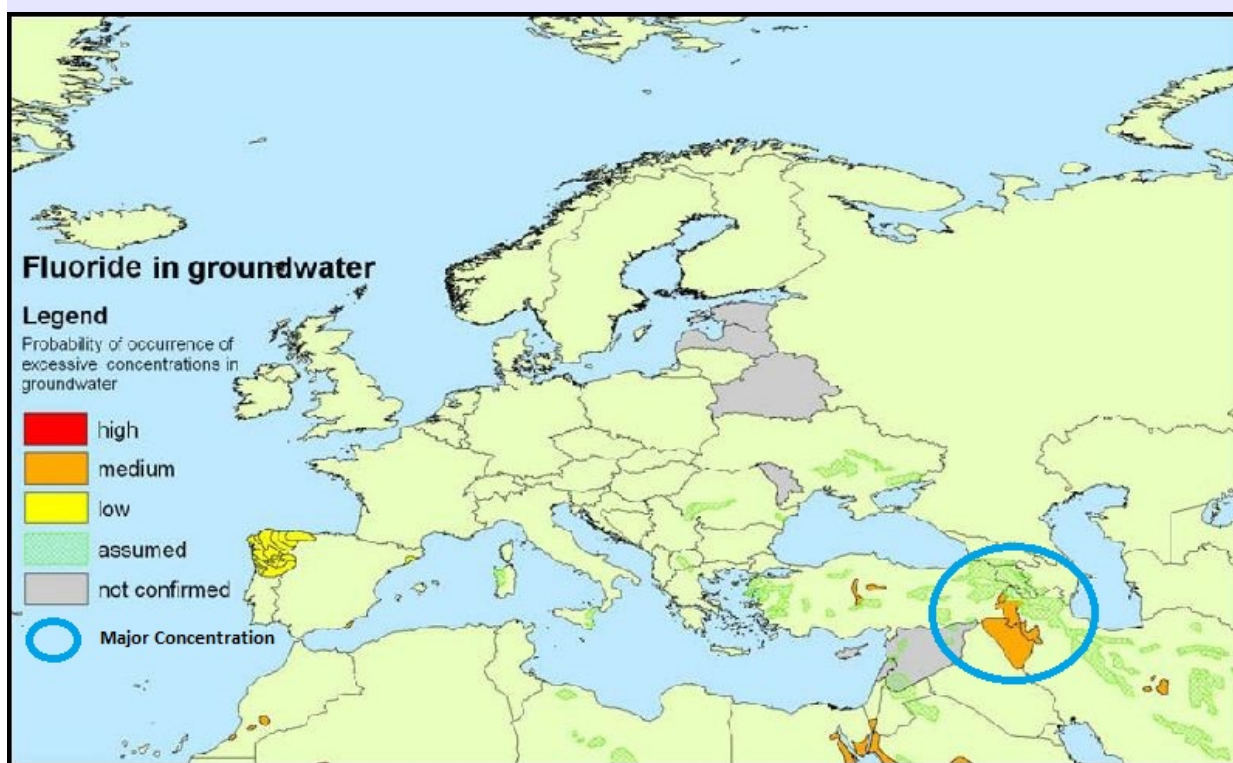


Fig 4: A Map of Western Asia showing a major concentration of Fluoride contamination in Groundwater. Website of International Groundwater Resources Assessment Centre - www.un-igrac.org

AFRICA

One of the continents in the world where the groundwater is the main source of drinking water like most part of Asian countries. Some portion of Africa mainly Eastern and westernmost region is highly affected by fluoride contamination as shown in (Fig 5).

Kenya

From the area of Bondo- Rasida Area, Kenya a total of 23 numbers of water samples were collected from borewells of 6 divisions. The maximum concentration of Fluoride from water samples collected from borewell was found out to be 2.09 mg/l which is much higher than the permissible limit of WHO water sample i.e. 1.5 mg/l (*Wambu et al., 2014*). A survey done in Kenya was found to have around 62% of samples have concentration more than 1 mg/l and around 20% of samples have concentration above 5mg/l. (*Menya et al., 2019*).

Algeria

Some study areas were chosen by the National Institute of Algerian Public Health on the basis of the population affected by dental fluorosis. It was observed that the three sources were responsible for fluorosis. The total intake of fluoride content was observed due to ingestion of Tea, Dates and drinking water (groundwater). After a thorough analysis of these three sources, it was found out that approximately 70% of the total fluoride consumption is from drinking water (groundwater) and it was in range from 0.4 mg/l to 2.3 mg/l which is also higher than the standard set by WHO (1.5 mg/l). (*Messaïtfa, 2008*).

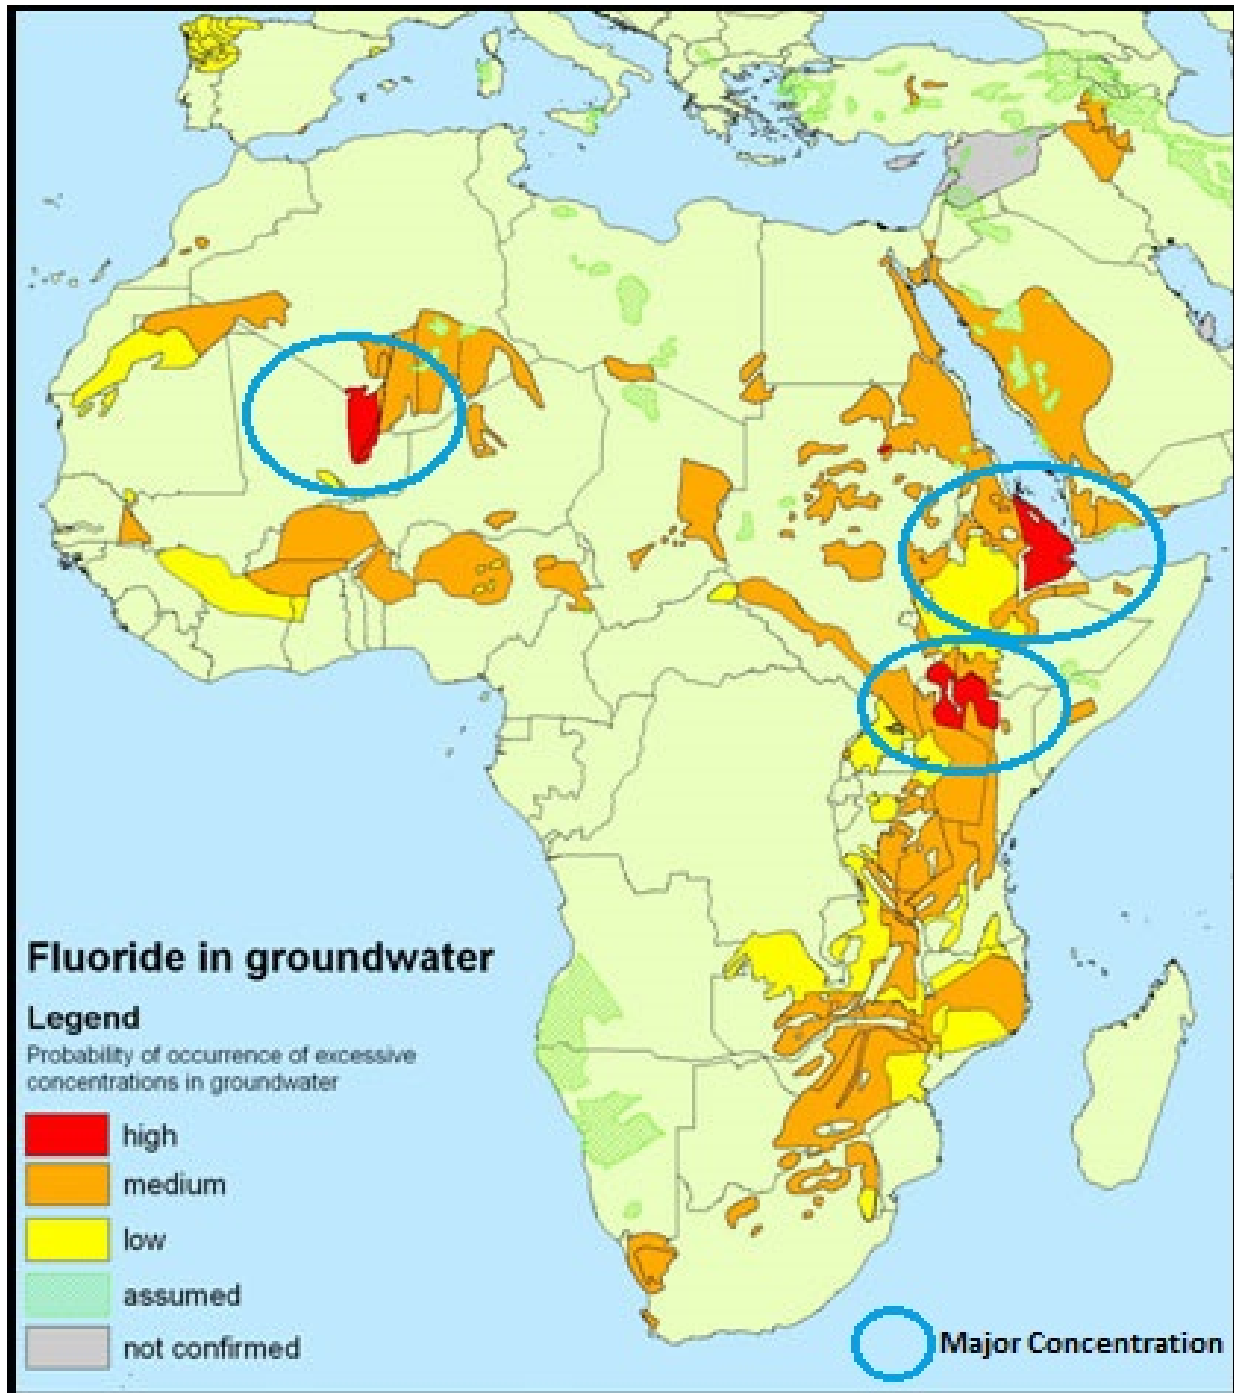


Fig 5: A Map of Africa showing a major concentration of Fluoride contamination in Groundwater. Website of International Groundwater Resources Assessment Centre - www.un-igrac.org

AMERICA

America generally doesn't have any problems with drinking water quality, but in some parts of America, especially the rural and underdeveloped parts might have some water quality related issues. An overview map of North and South America can be seen in (Fig 6 and Fig 7).

USA

Wisconsin, a state in the USA received 88% of drinking water from surface water sources and the remaining 12% from groundwater. A study on 4000 water supplies from rural areas was examined for the test of Fluoride, Coliform bacteria, etc and the result was actually surprising, 47% of the tested water sources were found to have one or more than one health concerns and can be unfit for drinking. A fluoride concentration of 1.2 mg/l can prevent dental carries but a concentration more than that can cause dental fluorosis. Accordingly, 3 number districts were identified namely Cambrian and Ordovician confined aquifers, Shoreline along Lake Michigan and Marathon County having Fluoride concentration mean 1.32 mg/l, 2 mg/l - 4 mg/l and 0.07 mg/l - 7.6 mg/l respectively. These districts were found to have concentration more than 1.2 mg/l and the source for the contamination of groundwater were found out to be Fluorite and Fluorapatite. (Luczaj and Masarik, 2015).

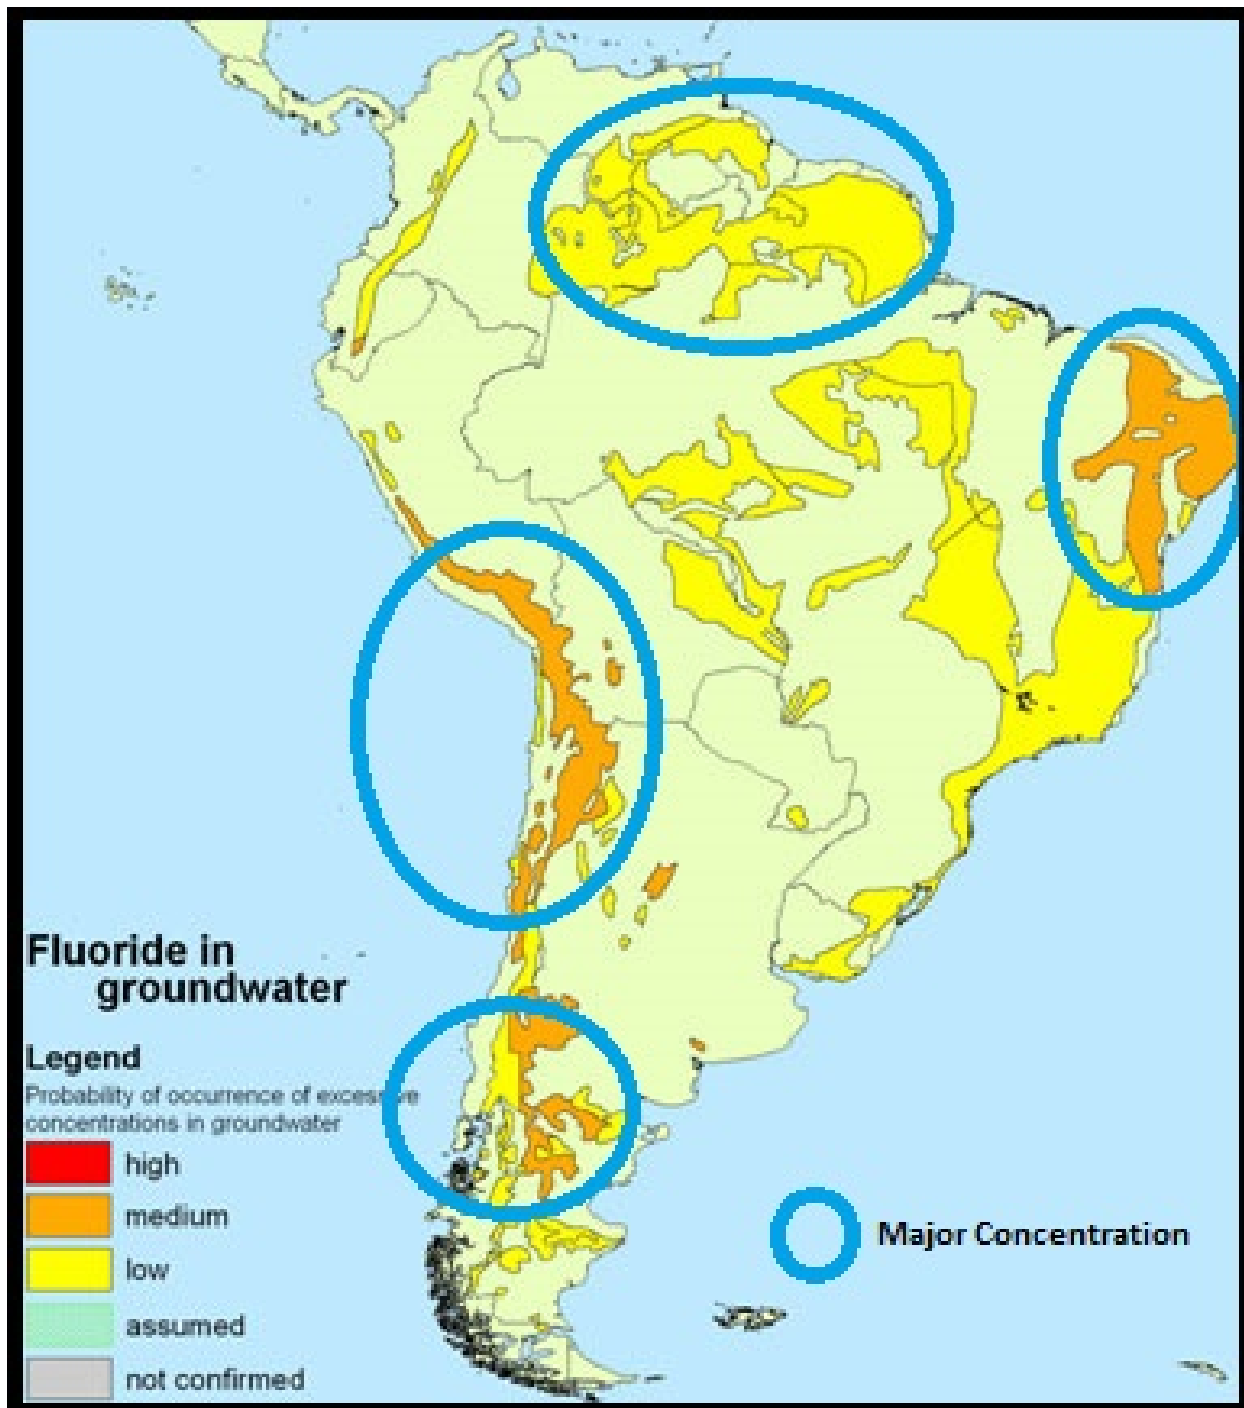


Fig 6: A Map of North America showing a major concentration of Fluoride contamination in Groundwater. Website of International Groundwater Resources Assessment Centre - www.un-igrac.org

Other Parts of America

A study for 2 years in Los Azufres, Michoacán identifies Fluoride content in groundwater ranges from 10 mg/l to 90 mg/l which is on the extreme higher side of the acceptable limit (1.5 mg/l). Araró, Northern part of Michoacán shows the fluoride content around 0.7 mg/l to 4.2 mg/l, again high. Another study in Chaco-Pampean plain was organized to determine the different types of contaminants in groundwater and some areas which were mainly targeted including La Pampa, Northern Province (0.9 mg/l - 3.9 mg/l), Buenos Aires, Shallow wells (5 mg/l - 7mg/l), Córdoba, South Eastern Province (0.26 mg/l - 6.3 mg/l), Córdoba, Southern Province (1.4 mg/l - 6.8 mg/l), and Santiago del Estero, Rio Dulce Alluvial Cone (0.7 mg/l to 22 mg/l). After the study, it was prominent that the fluoride content in various parts of South America is also very high and is unfit for drinking.

The reason for high contamination deduced from these studies is the interaction between geomorphological, geology and local landform features. As a solution, the removal process used is alone or in combinations of different methods. The predominant methods used for removal of these fluoride contaminants in these parts of America includes Membrane technology, Coagulation/Filtration process or adsorption by using activated Alumina. (*Alarcón-Herrera et al., 2013*).




Fig

7: A Map of South America showing a major concentration of Fluoride contamination in Groundwater. Website of International Groundwater Resources Assessment Centre - www.un-igrac.org

OTHER PARTS OF THE GLOBE

Different studies were done in different parts of the world where the sign of any problem related to water contamination is detected. It was found out that major cause of Dental Fluorosis was because of high fluoride contamination in water sources used for drinking. An exhaustive list of Fluoride data across the globe is given in *Table 1*. Few areas which are pointed by British Geological Survey (*Fig 8*) which have more than 1.5 mg/l (WHO standard) fluoride contamination includes Region of North China, Southern Eastern Part of India, Eastern African region, Southern South American parts, and Some Parts along Western North America. There is moderate contamination of fluoride (up to 0.69 mg/l) groundwater in some parts of Australia. (*Petrides and Cartwright, 2006*). The map of contamination in Australia can be seen (*Fig, 9*).

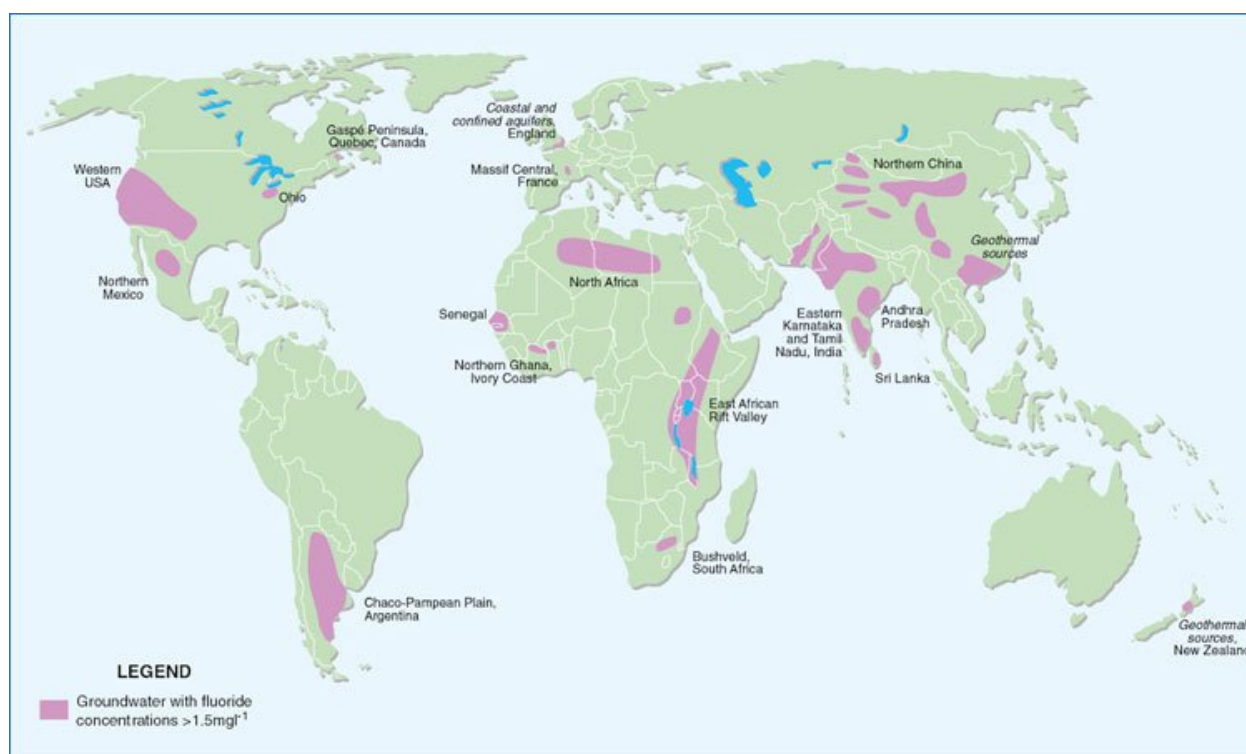

Fig

8: A Map of the World showing a major concentration of Fluoride contamination in Groundwater. Website of British Geological Survey - www.bgs.ac.uk.

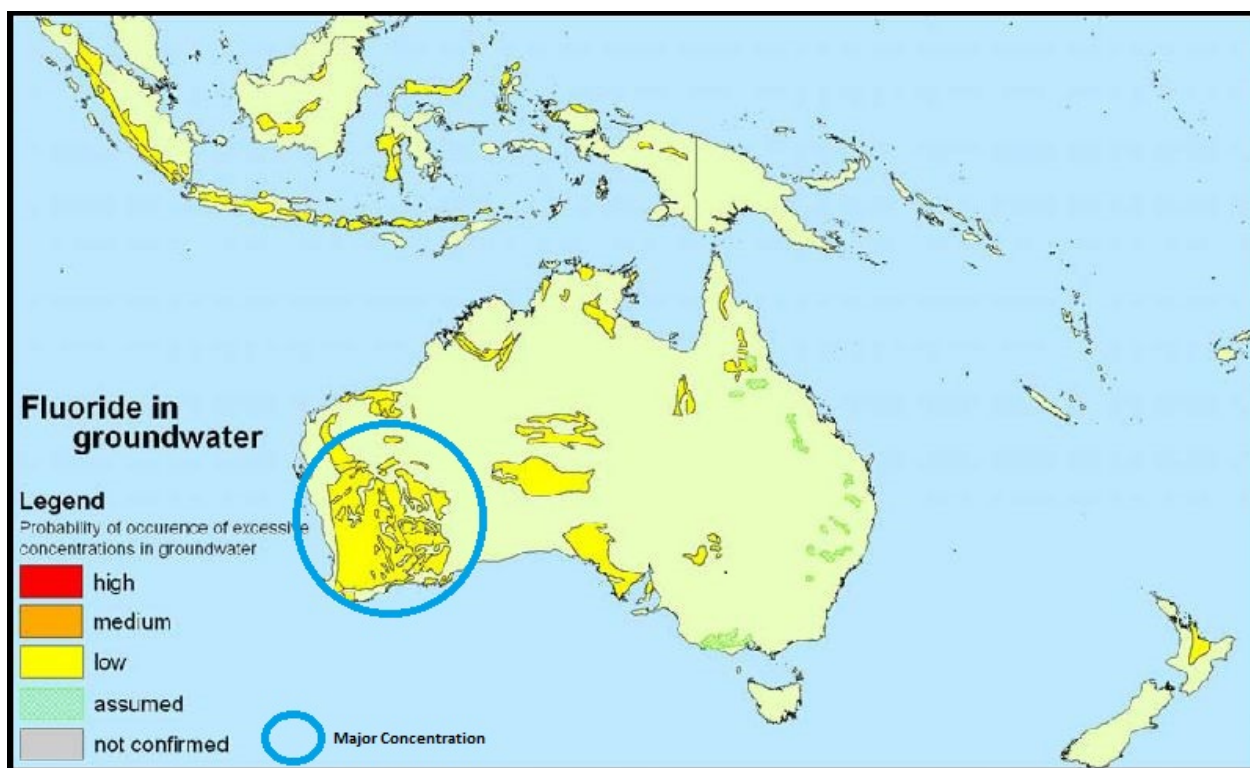


Fig 9: A Map of Australia showing a major concentration of Fluoride contamination in Groundwater. Website of International Groundwater Resources Assessment Centre - www.un-igrac.org

GLOBAL DATA OF FLUORIDE CONTAMINATION

<u>Location</u>	<u>Range of Fluoride (mg/l)</u>	<u>Citations</u>
<u>SOUTH EAST ASIA</u>		
Bogor, Java, Indonesia	3.0 mg/l	(Rugayah <i>et al.</i> , 2014)
Nakorn Patum, Thailand	3.5 mg/l	(Smittakorn <i>et al.</i> , 2010)
<u>IRAN</u>		
Chatrood village, Iran	0.20 – 1.99 mg/l	(Dehbandi <i>et al.</i> , 2017)
Yazd province, Iran	0.22 -2.35 mg/l	(Dehbandi <i>et al.</i> , 2018)
Bushehr province, Iran	1.52 – 3.94 mg/l	(Dobaradaran <i>et al.</i> , 2018)
Gonabad, Iran	0.44 – 1.62 mg/l	(Karimi <i>et al.</i> , 2018)
Wet Season, South of Iran	1.75 – 3.92 mg/l	(Rezaei <i>et al.</i> , 2017)
Dry Season, South of Iran	0.59 - 3.18 mg/l	(Rezaei <i>et al.</i> , 2017)

Tabriz, Iran	upto 9.0 mg/l	(Vaezihir <i>et al.</i> , 2016)
Gonabad, Iran	0.46- 1.56 mg/l	(Karimi <i>et al.</i> , 2018)
Maku Area, Iran	0.3 – 5.96 mg/l	(Asghari M. <i>et al.</i> , 2008)
Areas of Iran	avg 1.86 mg/l	(Mesdaghinia <i>et al.</i> , 2010)

INDIA

Vijayapura, Karnataka, India	0.26-3.53 mg/l	(Ugran V. <i>et al.</i> , 2017)
Sahibganj, Jharkhand, India	0.12- 29.0 mg/l	(Nayak <i>et al.</i> , 2009)
Alleppey town, Kerala, India	upto 2.88 mg/l	(Raj and Shaji, 2017)
Nayagarh, Orissa, India	0.16 - 10.1 mg/l	(Kundu N. <i>et al.</i> , 2001)
Central Rajasthan, India	5.91 mg/l	(Hussain <i>et al.</i> , 2012)
Kolar, Karnataka	0.36 – 3.34 mg/l	(Mamatha and Rao, 2010)
Tumkur, Karnataka	0.78 – 5.35 mg/l	(Mamatha and Rao, 2010)
Guntur District, Andhra Pradesh	0.3- 2.0 mg/l	(Subba Rao, 2006)
Mehsana, Gujrat	0.94 – 2.81 mg/l	(Salve <i>et al.</i> , 2008)

SRI LANKA

Anuradhapura, Sri Lanka	max 7.0 mg/l	(Weragoda <i>et al.</i> , 2017)
NuwaraEliya, Sri Lanka	max 0.1 mg/l	(Weragoda <i>et al.</i> , 2017)
Puttalam, Sri Lanka	max 2.2 mg/l	(Weragoda <i>et al.</i> , 2017)
Mannar, Sri Lanka	max 1.2 mg/l	(Weragoda <i>et al.</i> , 2017)
Jaffna, Sri Lanka	max 1.3 mg/l	(Weragoda <i>et al.</i> , 2017)
Incomalee, Sri Lanka	max 2.4 mg/l	(Weragoda <i>et al.</i> , 2017)
Batticaloa, Sri Lanka	Max 0.7 mg/l	(Weragoda <i>et al.</i> , 2017)
Hambantota, Sri Lanka	max 1.5 mg/l	(Weragoda <i>et al.</i> , 2017)
Matale, Sri Lanka	max 0.8 mg/l	(Weragoda <i>et al.</i> , 2017)
Kurunegala, Sri Lanka	max 5.0 mg/l	(Weragoda <i>et al.</i> , 2017)
Polonnaruwa, Sri Lanka	max 1.8 mg/l	(Weragoda <i>et al.</i> , 2017)
Vavuniya, Sri Lanka	max 3.1 mg/l	(Weragoda <i>et al.</i> , 2017)
North Central Province, Sri Lanka	3.9 - 7.3 mg/l	(Dharmaratne, 2015)
Trincomalee, Sri Lanka	upto 2.4 mg/l	(Weragoda <i>et al.</i> , 2017)
Mannar, Sri Lanka	upto 1.2 mg/l	(Weragoda <i>et al.</i> , 2017)
Areas of Sri Lanka	max 10 mg/l	(Dissanayake, 1991)

PAKISTAN

Nagar Parkar Area, Sindh	1.13 – 7.85 mg/l	(Rafique <i>et al.</i> , 2009)
East Punjab, Pakistan	max 22.8 mg/l	(FAROOQI <i>et al.</i> , 2007)

CHINA

Guangdong, China	max 25.1 mg/l	(Wen et al., 2013)
Xinjiang, China	max 21.5 mg/l	(Wen et al., 2013)
Tibet, China	max 19.6 mg/l	(Wen et al., 2013)
Beijing, China	max 8.0 mg/l	(Wen et al., 2013)
Datong Basin, Northern China	0.1- 8.3 mg/l	(Su et al., 2013)
Taiyuan basin, northern China	6.20 mg/l	(Guo et al., 2007)

JAPAN

Tono Area, Japan	max 12 mg/l	(ABDELGAWAD <i>et al.</i> , 2008)
Mizunami Area, Japan	2 – 7 mg/l	(Abdelgawad <i>et al.</i> , 2009)

NORTH AMERICA

Texas, USA	0.59 – 0.88 mg/l	(Chaudhuri and Ale, 2014)
Wisconsin, USA	0.01 – 7.6 mg/l	(Luczaj and Masarik, 2015)
San Luis Potosi basin, Mexico	3.7 mg/l	(Carrillo-Rivera <i>et al.</i> , 2002)
Interlake, Manitoba, Canada	0.084 – 15.1 mg/l	(Leybourne <i>et al.</i> , 2008)

SOUTH AMERICA

Buenos Aires, Atlantic region	0.9 – 3.9 mg/l	(Alarcón-Herrera <i>et al.</i> , 2013)
N. La Pampa	0.9-3.9 mg/l	(Alarcón-Herrera <i>et al.</i> , 2013)
S.E. Córdoba	0.26–6.3 mg/l	(Alarcón-Herrera <i>et al.</i> , 2013)
Santiago del Estero, Rio Dulce Alluvial Cone	0.7–22 mg/l	(Alarcón-Herrera <i>et al.</i> , 2013)

EUROPE

South Eastern, Sweden	4.2 mg/l	(Berger <i>et al.</i> , 2012)
Laxemar, Sweden	1.2-7.4 mg/l	(Berger <i>et al.</i> , 2016)
Slovakia	0.05- 4 mg/l	(Fordyce <i>et al.</i> , 2007)
Bujanovac valley, Serbia	1-7 mg/l	(Krunice <i>et al.</i> , 2013)

-

SOUTH KOREA

Jungwon area, South Korea.	6-10 mg/l	(CHAE <i>et al.</i> , 2007)
Spa Area, South Korea	4.4 mg/l	(CHAE <i>et al.</i> , 2007)

-

AFRICA

Uyoma, Kenya	mean 1.39 mg/l	(Wambu <i>et al.</i> , 2014)
Nyang'oma, Kenya	mean 1.00 mg/l	(Wambu <i>et al.</i> , 2014)
Nakuru County, Kenya	8.0 mg/l	(Izuagie <i>et al.</i> , 2015)
Central Rift, Kenya	1.2- 36.0 mg/l	(Edmunds, W. M. 2012)
Asembo, Kenya	mean 0.92 mg/l	(Wambu <i>et al.</i> , 2014)
Eldoret, western Kenya.	1-5.0 mg/l	(Menya <i>et al.</i> , 2019)
Siloam Village, South Africa	max 30 mg/l	(Odiyo and Makungo, 2012)
Florisbad, Karoo Basin, South Africa	0.9 -5.7 mg/l	(Harkness <i>et al.</i> , 2018)
Siloam Village, South Africa	0-6.74 mg/l	(Odiyo and Makungo, 2018)
Upper Region, Ghana	0.11 – 4.60 mg/l	(Apambire <i>et al.</i> , 1997)
Northern Region, Ghana	0.00 – 11.6 mg/l	(Salifu <i>et al.</i> , 2012)
Chikhwawa, Malawi	0.2 – 4.8 mg/	(Grimason <i>et al.</i> , 2013)
Ziway–Shala basin, Ethiopia	1.1 – 68 mg/l	(Rango <i>et al.</i> , 2012)
Benguerir, Morocco	1.8- 20 mg/l	(Tahaikt <i>et al.</i> , 2007)

Table 1: Table Showing data of Fluoride Contamination of the various regions across the Globe.

METHODS USED TO REMOVE FLUORIDE CONTAMINATION FROM GROUNDWATER

There are many methods used around the globe for the treatment of Fluoride contaminated water. Some of the principal used to remove fluoride from water sample includes Ion Exchange, Adsorption, Precipitation, Coagulation, Defluoridation using Electrolytic method, Electrodialysis and Membrane separation Process. There are different raw material used in these processes and further researches are going on to make these processes more economical and efficient. (Nath and Dutta, 2010).

Electrolytic Defluoridation

This method is based on the process of Electrocoagulation with electrodes of Bipolar

Aluminium. In this process, it is to be ensured that there are no soluble salts present in the water which is supplied to be treated. The weight ratio of Aluminium to Fluoride is approx 17:1.

The optimum condition for this method is illustrated below-

pH range: 5- 7.6

Area/Volume ratio of Electrode: Order of $25\text{m}^2\text{m}^{-3}$

Temperature: 20 °C

Distance between electrodes: 2 cm

Current Density: 75Am^{-2}

Type of Reactor: Batch Reactor.

This method is efficient in removing fluoride from 1l of water by just consuming approx 40kg of Aluminium. Some of the pros of this method can be that the operation of this process doesn't require a highly qualified or trained professional and it's easy to maintain(Mameri et al., 2001).

RO Membrane Separation

When the water has a high concentration of Fluoride are passed through a Reverse Osmosis Membrane it was found out that the removal of more than 97% of fluoride can be obtained from just passing the contaminated water from RO membrane. It was also observed that the retained concentration of fluoride by the membrane and water flux decrease with time, which indeed can be cleared by backwashing the membrane, making this process a technically difficult process but this process can be considered as one of the economic processes because in this process just a regular industrial RO membrane is used for the defluoridation process and that too with very good efficiency.(Ndiaye et al., 2005).

Electrodialysis

Defluoridation is done using the applied varied potential difference (1.5 volts/cell to 2.5 volts/cell) for efficiency it was taken as 2.0 volts/cell. Other parameters are kept constant

such as

Flow Rate: 8 Lph.

Feed Concentration : 1950 mg/l

Fluoride concentration : 9.5 mg/l (Initial).

Potential difference : 1.7 volts/cell.

In this test, it was also observed that desalination is observed along with defluoridation in the brackish water sample. TDS concentration (210 ppm), as well as Fluoride concentration (1.03 mg/l), reached approx to drinking water parameters. The process used is a Continuous reactor with the overall efficiency of the process is around 87%. Initially, the reaction is fast but the due course of time it reduces due to a decrease in ion concentration. (Sharma *et al.*, 2018).

Adsorption

For this method, a composite of Polymer/By-polymer is used as an adsorbent. In this particular process, the adsorbent used is Polyaniline/Chitosan and Polypyrrole/Chitosan. The mechanism used for this adsorption process is Dopant (Double) exchange mechanism. This doesn't change the crystalline nature of the polymer therefore not much change can be seen in X-Ray Powder Diffraction pattern for before and after the adsorption.

The following Initial conditions are adopted for this process-

Reactor: Batch Reactor.

The concentration of Fluoride: 2-10 mg/l.

Contact Time: 5- 30 minutes.

pH range: 3-9

Composite dosage: 25- 200 mg/ 50 ml.

Temperature: 30- 50 °C

It was observed that the Low pH and High temperature is favorable for this method and it was also inferred that the process is endothermic in nature. Further observations conclude that as the number of dosage increases the adsorption of Fluoride also increases, this is due to the fact that more dose equivalent to more ion for adsorption. Furthermore,

Polypyrrole/Chitosan is more effective in this process of adsorption as compared to Polyaniline/Chitosan. (Karthikeyan, 2011).

Coagulation/ Filtration

This method is widely used to filter suspended and dissolved solids from raw water before drinking. This method is also used to filter out fluoride from water ranging from 1.8 mg/l to 2.0 mg/l. The method involved in this process consists of particles becoming heavy through thorough agitating with a coagulant and then later it settles down. A single compound can be used as a coagulant or in some combinations. The generally used coagulants are Alum, Aluminium Polychloride,(PAC), Polymeric anionic flocculant (PAF), and Aluminium Sulphate alone or in combinations. The pH preferred for this method is around 6.9- 7.0. This process requires a constant check on the amount of contamination and its commensurated dosage. The combination of Alum and PAF can be used to treat water of 5.9 mg/l fluoride content with an approximate 77% efficiency and bring it to 1.5 mg/l. (Alarcón-Herrera et al., 2013).

METHODS FOR EFFECTIVE DISCHARGE OF SLUDGE IN ENVIRONMENT

Defluoridation of water is sometimes necessary if the content of fluoride in water is more. After the process of defluoridation, a huge quantity of fluoride sludge is left out. This is one of the leading problems which needs to be addressed as far as the fluoride treatment is concerned. The fate of the sludge generated through the defluoridation process is generally disposed of off to the landfills which ultimately cause harmful effect on the environment and may also lead to the formation of leachates which ends up in the groundwater later. But, if looked at some of the erudite documents that can help in providing some ways by which this contamination can be decreased.

During the process of Electrocoagulation is used for the treatment of fluoride from water and wastewater, if the potential difference applied can be increased then a lapse in

concentration of F^- can be seen and when the voltage is turned to high then this may lead to the formation of bubbles in the water which ultimately will help in the process of sludge separation process. (*Drouiche et al., 2011*).

Sludge produced during treatment using the processes of DCPD (Dicalcium Phosphate Dihydrate) method is due to the heterogeneous reaction of DCPD with fluoride. Settleability of the residual Fluoride is an important parameter for separating the sludge for its further treatment. It is always recommended that sludge should settle rapidly. So, in this process i.e. DCPD process, the sludge is rapidly settleable as compared to conventional Aluminium method in which it takes time to settle. The fluoride residue generated after this process is $< 8 \text{ mg/l}$ which is actually very less than the Environment standard for disposal of leachates. (*Tafu et al., 2016*) The aim for the successful fluoride treatment should also include efficient disposal of sludge also.

CONCLUSION

Global water scarcity, unavailability of fresh water and degradation in health plays an important role to think upon surface water pollution. There are various conceptual and empirical approaches are being used for the study upon surface water pollution mainly caused due to fluoride. The present study has been done to cover almost all regions of the Globe and it was found out that almost every part of the Globe is affected by Fluoride Contamination. Even though many Developed Nations have figured their way to curb with these fluoride contamination problems but Cits still predominant in Developing Countries and Researchers are putting efforts to find a feasible and economical solution for the same. Different possible methods for Fluoride Contamination detection which includes SPADNS Spectrophotometric Method, Ion Selective Electrode Method, and Ion Chromatography have been described along with few possible methods to remove the contamination covers Electrolytic Defluoridation, RO membrane separation, Electrodialysis, Adsorption, and Coagulation and Filter process also have been discussed.

During the study, it was found out that there are not many ways available to dispose of the filtered fluoride from water. Some research can be done in the field of fate and disposal of filtered fluoride.

REFERENCES

- Abdelgawad, A. M. et al. (2009) 'The origin of fluoride-rich groundwater in Mizunami area, Japan — Mineralogy and geochemistry implications', *Engineering Geology*, 108(1–2), pp. 76–85. doi: 10.1016/j.enggeo.2009.06.016.
- Abdelgawad, M. A., Watanabe, K. And Takeuchi, S. (2008) 'laboratory Tests On The Occurrence Of Fluoride Rich Groundwater Of Tono Area, Japan', *Proceedings Of Hydraulic Engineering*, 52, Pp. 25–30. Doi: 10.2208/prohe.52.25.
- Alarcón-Herrera, M. T. et al. (2013) 'Co-occurrence of arsenic and fluoride in groundwater of semi-arid regions in Latin America: Genesis, mobility and remediation', *Journal of Hazardous Materials*, 262, pp. 960–969. doi: 10.1016/j.jhazmat.2012.08.005.
- Aldaco, R., Garea, A. and Irabien, A. (2007) 'Calcium fluoride recovery from fluoride wastewater in a fluidized bed reactor', *Water Research*, 41(4), pp. 810–818. doi: 10.1016/j.watres.2006.11.040.
- Apambire, W. B., Boyle, D. R. and Michel, F. A. (1997) 'Geochemistry, genesis, and health implications of floriferous groundwater in the upper regions of Ghana', *Environmental Geology*, 33(1), pp. 13–24. doi: 10.1007/s002540050221.
- Asghari Moghaddam, A. and Fijani, E. (2008) 'Distribution of fluoride in groundwater of Maku area, northwest of Iran', *Environmental Geology*, 56(2), pp. 281–287. doi: 10.1007/s00254-007-1163-2.
- Berger, T. et al. (2012) 'Impact of a Fluorine-Rich Granite Intrusion on Levels and Distribution of Fluoride in a Small Boreal Catchment', *Aquatic Geochemistry*, 18(2), pp. 77–94. doi: 10.1007/s10498-011-9151-2.
- Berger, T. et al. (2016) 'Fluoride abundance and controls in fresh groundwater in Quaternary deposits and bedrock fractures in an area with fluorine-rich granitoid rocks', *the Science of The Total Environment*, 569–570, pp. 948–960. doi: 10.1016/j.scitotenv.2016.06.002.

- Brindha, K., R. Rajesh, R. Murugan, and L. Elango. 2011. Fluoride contamination in groundwater in parts of Nalgonda District, Andhra Pradesh, India. *Environ. Monit. Assess.* 172:481–492. doi:10.1007/s10661-010-1348-0.
- Carrillo-Rivera, J. ., Cardona, A. and Edmunds, W. . (2002) 'Use of abstraction regime and knowledge of hydrogeological conditions to control high-fluoride concentration in abstracted groundwater: San Luis Potosí basin, Mexico', *Journal of Hydrology*, 261(1–4), pp. 24–47. doi: 10.1016/S0022-1694(01)00566-2.
- CHAE, G. et al. (2007) 'Fluorine geochemistry in bedrock groundwater of South Korea', *the Science of The Total Environment*, 385(1–3), pp. 272–283. doi: 10.1016/j.scitotenv.2007.06.038.
- Chakraborty, S. et al. (2016) 'Fluoride in groundwater: low-cost separation and stabilization by response surface optimization', *International Journal of Environmental Science and Technology*. Springer Berlin Heidelberg, 13(3), pp. 813–824. doi: 10.1007/s13762-015-0904-0.
- Chaudhuri, S. and Ale, S. (2014) 'Evaluation of Long-Term (1960–2010) Groundwater Fluoride Contamination in Texas', *Journal of Environmental Quality*, 43(4), p. 1404. doi: 10.2134/jeq2013.04.0133.
- Chu, C. H. and Lo, E. (2008) 'Uses of sodium fluoride varnish in dental practice.', *Annals of the Royal Australasian College of Dental Surgeons*, 19, pp. 58–61.
- Dehbandi, R. et al. (2017) 'Fluoride hydrogeochemistry and bioavailability in groundwater and soil of an endemic fluorosis belt, central Iran', *Environmental Earth Sciences*, 76(4), p. 177. doi: 10.1007/s12665-017-6489-9.
- Dehbandi, R., Moore, F. and Keshavarzi, B. (2018) 'Geochemical sources, hydrogeochemical behavior, and health risk assessment of fluoride in an endemic fluorosis area, central Iran', *Chemosphere*, 193, pp. 763–776. doi: 10.1016/j.chemosphere.2017.11.021.
- Dharmaratne, R. W. (2015) 'Fluoride in drinking water and diet: the causative factor of chronic kidney diseases in the North Central Province of Sri Lanka', *Environmental Health and Preventive Medicine*, 20(4), pp. 237–242. doi: 10.1007/s12199-015-0464-4.
- Dissanayake, C. B. (1991) 'The fluoride problem in the ground water of Sri Lanka — environmental management and health', *International Journal of Environmental Studies*, 38(2–3), pp. 137–155. doi: 10.1080/00207239108710658.

- Do Baradaran, S. et al. (2018) 'Data on fluoride contents in groundwater of Bushehr province, Iran', Data in Brief, 17, pp. 1158–1162. doi: 10.1016/j.dib.2018.02.016.
- Drouiche, N. et al. (2011) 'Development of an empirical model for fluoride removal from photovoltaic wastewater by electrocoagulation process', Desalination and Water Treatment, 29(1–3), pp. 96–102. doi: 10.5004/dwt.2011.1966.
- Environmental Health Criteria: 227 (Fluorides) Webpage: <http://www.inchem.org/documents/ehc/ehc/ehc227.htm>
- FAROOQI, A. et al. (2007) 'Distribution of highly arsenic and fluoride contaminated groundwater from east Punjab, Pakistan, and the controlling role of anthropogenic pollutants in the natural hydrological cycle', GEOCHEMICAL JOURNAL, 41(4), pp. 213–234. doi: 10.2343/geochemj.41.213.
- Fordyce, F. M. et al. (2007) 'A health risk assessment for fluoride in Central Europe', Environmental Geochemistry and Health, 29(2), pp. 83–102. doi: 10.1007/s10653-006-9076-7.
- Freni, S. C. (1994) 'Exposure to high fluoride concentrations in drinking water is associated with decreased birth rates', Journal of Toxicology and Environmental Health, 42(1), pp. 109–121. doi: 10.1080/15287399409531866.
- Gill, T., Tiwari, S. and Kumar, P. A. (2014) 'A Review on Feasibility of Conventional Fluoride Removal Techniques in Urban Areas', International Journal of Environmental Research and Development, 4(2), pp. 179–182.
- Grimason, A. et al. (2013) 'Classification and quality of groundwater supplies in the Lower Shire Valley, Malawi – Part 2: Classification of borehole water supplies in Chikhwawa, Malawi', Water SA, 39(4). doi: 10.4314/wsa.v39i4.17.
- Guo, Q. et al. (2007) 'Geochemical processes controlling the elevated fluoride concentrations in the groundwater of the Taiyuan Basin, Northern China', Journal of Geochemical Exploration, 93(1), pp. 1–12. doi: 10.1016/j.gexplo.2006.07.001.
- Harkness, J. S. et al. (2018) 'GEOGENIC METHANE AND FLUORIDE IN GROUNDWATER OF THE KAROO BASIN, SOUTH AFRICA', in. doi: 10.1130/abs/2018AM-323985.
- Hussain, I., Arif, M. and Hussain, J. (2012) 'Fluoride contamination in drinking water in rural habitations of Central Rajasthan, India', Environmental Monitoring and Assessment, 184(8), pp. 5151–5158. doi: 10.1007/s10661-011-2329-7.
- Hydrology Project Training Module; Training module # WQ - 36 How to measure Fluoride: SPADNS Spectrophotometric Method. Webpage: <http://indiawrm.org/>

[HP-1/download/36%20Measurement%20of%20Fluoride.pdf](#)

- Izuagie, A. A., Gitari, W. M. and Gumbo, J. R. (2015) 'Defluoridation of groundwater using diatomaceous earth: optimization of adsorption conditions, kinetics and leached metals risk assessment', *Desalination and Water Treatment*, pp. 1–13. doi: 10.1080/19443994.2015.1083894.
- Jolly, S. S. et al. (1968) 'Epidemiological, Clinical, and Biochemical Study of Endemic Dental and Skeletal Fluorosis in Punjab', *British Medical Journal*, 4(5628), pp. 427–429. doi: 10.1136/bmj.4.5628.427.
- Karimi, A. et al. (2018) 'Fluoride concentration data in groundwater resources of Gonabad, Iran', *Data in Brief*, 21, pp. 105–110. doi: 10.1016/j.dib.2018.09.062.
- Karthikeyan, M., Kumar, K. K. S. and Elango, K. P. (2011) 'Batch sorption studies on the removal of fluoride ions from water using eco-friendly conducting polymer/bio-polymer composites',
- KheradPisheh, Z. et al. (2018) 'Impact of drinking water fluoride on human thyroid hormones: A case-control study', *Scientific Reports*. Springer US, 8(1), pp. 1–7. doi: 10.1038/s41598-018-20696-4.
- Krunić, O. et al. (2013) 'Origin of Fluorine in Mineral Waters of Bujanovac Valley (Serbia, Europe)', *Геохимия*, 2013(3), pp. 229–244. doi: 10.7868/S0016752513010056.
- Leybourne, M. I. et al. (2008) 'The Lake St. Martin bolide has a big impact on groundwater fluoride concentrations', *Geology*, 36(2), p. 115. doi: 10.1130/G24135A.1.
- Luczaj, J. and Masarik, K. (2015) 'Groundwater Quantity and Quality Issues in a Water-Rich Region: Examples from Wisconsin, USA', *Resources*, 4(2), pp. 323–357. doi: 10.3390/resources4020323.
- Mamatha, P. and Rao, S. M. (2010) 'Geochemistry of fluoride rich groundwater in Kolar and Tumkur Districts of Karnataka', *Environmental Earth Sciences*, 61(1), pp. 131–142. doi: 10.1007/s12665-009-0331-y.
- Mameri, N. et al. (2001) 'Defluoridation of Sahara water by small plant electrocoagulation using bipolar aluminium electrodes', *Separation and Purification Technology*, 24(1–2), pp. 113–119. doi: 10.1016/S1383-5866(00)00218-5.
- Menya, D. et al. (2019) 'Dental fluorosis and oral health in the African Esophageal

- Cancer Corridor: Findings from the Kenya ESCCAPE case-control study and a pan-African perspective', *International Journal of Cancer*, 145(1), pp. 99–109. doi: 10.1002/ijc.32086.
- Mesdaghinia, A. et al. (2010) 'Monitoring of Fluoride in Groundwater Resources of Iran', *Bulletin of Environmental Contamination and Toxicology*, 84(4), pp. 432–437. doi: 10.1007/s00128-010-9950-y.
- Miyake, Y. et al. (2007) 'Determination of trace levels of total fluorine in water using combustion ion chromatography for fluorine: A mass balance approach to determine individual perfluorinated chemicals in water', *Journal of Chromatography A*, 1143(1–2), pp. 98–104. doi: 10.1016/j.chroma.2006.12.071.
- N., K. et al. (2001) 'Geochemical appraisal of fluoride contamination of groundwater in the Nayagarh District of Orissa, India', *Environmental Geology*, 41(3–4), pp. 451–460. doi: 10.1007/s002540100414.
- Nath, S. K. and Dutta, R. K. (2010) 'Fluoride removal from water using crushed limestone', *Indian Journal of Chemical Technology*, 17(2), pp. 120–125.
- Nayak, B. et al. (2009) 'Health effects of groundwater fluoride contamination', *Clinical Toxicology*. Taylor & Francis, 47(4), pp. 292–295. doi: 10.1080/15563650802660349.
- Ndiaye, P. I. et al. (2005) 'Removal of fluoride from electronic industrial effluent by RO membrane separation', *Desalination*, 173(1), pp. 25–32. doi: 10.1016/j.desal.2004.07.042.
- Odiyo, J. and Makungo, R. (2012) 'Fluoride concentrations in groundwater and impact on human health in Siloam Village, Limpopo Province, South Africa', *Water SA*, 38(5). doi: 10.4314/wsa.v38i5.12.
- Odiyo, J. O. and Makungo, R. (2018) 'Chemical and Microbial Quality of Groundwater in Siloam Village, Implications to Human Health and Sources of Contamination', *International Journal of Environmental Research and Public Health*, 15(2), p. 317. doi: 10.3390/ijerph15020317.
- PEDIATRICS (ISSN 0031 4005). Copyright © 1986 by the American Academy of Pediatrics; PEDIATRICS Vol. 77 No. 5 May 1986. Webpage: <https://pediatrics.aappublications.org/content/pediatrics/77/5/758.full.pdf>
- Petrides, B., & Cartwright, I. (2006). *The hydrogeology and hydrogeochemistry of the*

- Barwon Downs Graben aquifer, southwestern Victoria, Australia. *Environmental Geology*, 14 (5), 809-826. Pickering, W.
- Rafique, T. et al. (2009) 'Geochemical factors controlling the occurrence of high fluoride groundwater in the Nagar Parkar area, Sindh, Pakistan', *Journal of Hazardous Materials*, 171(1-3), pp. 424-430. doi: 10.1016/j.jhazmat.2009.06.018.
- Raj, D. and Shaji, E. (2017) 'Fluoride contamination in groundwater resources of Alleppey, southern India', *Geoscience Frontiers*, 8(1), pp. 117-124. doi: 10.1016/j.gsf.2016.01.002.
- Rango, T. et al. (2012) 'Groundwater quality and its health impact: An assessment of dental fluorosis in rural inhabitants of the Main Ethiopian Rift', *Environment International*, 43, pp. 37-47. doi: 10.1016/j.envint.2012.03.002.
- Rao, S. M. et al. (2009) 'Re-use of fluoride contaminated bone char sludge in concrete', *Journal of Hazardous Materials*, 166(2-3), pp. 751-756. doi: 10.1016/j.jhazmat.2008.11.115.
- Rezaei, M., Nikbakht, M. and Shakeri, A. (2017) 'Geochemistry and sources of fluoride and nitrate contamination of groundwater in Lar area, south Iran', *Environmental Science and Pollution Research*, 24(18), pp. 15471-15487. doi: 10.1007/s11356-017-9108-0.
- Riordan, P. J. (1989) 'Guidelines for the use of dietary fluoride supplements in Australia', *Australian Dental Journal*, 34(4), pp. 359-362. doi: 10.1111/j.1834-7819.1989.tb04645.x.
- Rugayah, N. et al. (2014) 'Chicken Bone Charcoal for Defluoridation of Groundwater in Indonesia', *International Journal of Poultry Science*, 13(10), pp. 591-596. doi: 10.3923/ijps.2014.591.596.
- Salifu, A. et al. (2012) 'Multivariate statistical analysis for fluoride occurrence in groundwater in the Northern region of Ghana', *Journal of Contaminant Hydrology*, 140-141, pp. 34-44. doi: 10.1016/j.jconhyd.2012.08.002.
- Salve, P. R. et al. (2008) 'Assessment of Groundwater Quality with Respect to Fluoride', *Bulletin of Environmental Contamination and Toxicology*, 81(3), pp. 289-293. doi: 10.1007/s00128-008-9466-x.
- Sharma, P. P. et al. (2018) 'Mitigation of Fluoride from Brackish Water via Electrodialysis: An Environmentally Friendly Process', *ChemistrySelect*, 3(2), pp.

779–784. doi: 10.1002/slct.201701170.

Smittakorn, S. et al. (2010) 'Homemade bone charcoal adsorbent for defluoridation of groundwater in Thailand', *Journal of Water and Health*, 8(4), pp. 826–836. doi: 10.2166/wh.2010.131.

Su, C. et al. (2013) 'Aqueous geochemistry of high-fluoride groundwater in Datong Basin, Northern China', *Journal of Geochemical Exploration*, 135, pp. 79–92. doi: 10.1016/j.gexplo.2012.09.003.

Subba Rao, N. (2006) 'Seasonal variation of groundwater quality in a part of Guntur District, Andhra Pradesh, India', *Environmental Geology*, 49(3), pp. 413–429. doi: 10.1007/s00254-005-0089-9.

Sunitha, V. and Reddy, B. (2014) 'Determination of fluoride concentration in ground water by ion selective electrode', *Int. J. Curr. Res. Aca Rev*, 6(1), pp. 46–49. Available at: <http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.563.8972&rep=rep1&type=pdf>.

Tafu, M. et al. (2016) 'Properties of sludge generated by the treatment of fluoride-containing wastewater with dicalcium phosphate dihydrate', *Euro-Mediterranean Journal for Environmental Integration*. Springer International Publishing, 1(1), pp. 1–8. doi: 10.1007/s41207-016-0005-6.

Tahaikt, M. et al. (2007) 'Fluoride removal from groundwater by nanofiltration', *Desalination*, 212(1–3), pp. 46–53. doi: 10.1016/j.desal.2006.10.003.

Ugran, V. et al. (2017) 'Groundwater fluoride contamination and its possible health implications in Indi taluk of Vijayapura District (Karnataka State), India', *Environmental Geochemistry and Health*, 39(5), pp. 1017–1029. doi: 10.1007/s10653-016-9869-2.

Vaezihir, A. and Mohammadi, S. (2016) 'Groundwater contamination sourced from the main cemetery of Tabriz, Iran', *Environmental Forensics*, 17(2), pp. 172–182. doi: 10.1080/15275922.2016.1163621.

Wambu, E. W. et al. (2014) 'High fluoride water in Bondo-Rarieda area of Siaya County, Kenya: a hydro-geological implication on public health in the Lake Victoria Basin', *BMC Public Health*, 14(1), p. 462. doi: 10.1186/1471-2458-14-462.

Wen, D. et al. (2013) 'Arsenic, fluoride and iodine in groundwater of China', *Journal of Geochemical Exploration*, 135, pp. 1–21. doi: 10.1016/j.gexplo.2013.10.012.

Weragoda, S. K. and Kawakami, T. (2016) 'Evaluation of groundwater quality in 14

districts in Sri Lanka: A collaboration research between Sri Lanka and Japan', in Trends in Asian Water Environmental Science and Technology. Cham: Springer International Publishing, pp. 151–155. doi: 10.1007/978-3-319-39259-2_13.

© MultiSpectra Consultants, 2019.