

DIP 28 UC / 4VV - 2,2 kW / 3HP


NEW AUTO-ADAPTIVE MODEL, MORE COMPACT AND SELF-CLEANING WITH PATENTED DIPCUT® IMPELLER



INFOS




- Immersible IP67 with high efficiency IE3 motors, controlled by smart frequency converter.
- IOT available as an option.
- Fits any sanitation network configuration, without the need for straight inlet section.
- Shaft seal oil-free motor, large capacity.
- Fan cooling.
- Max. ambient temperature : +40°C/104°F
- Max. fluid temperature : +70°C/158°F
- Suction valves.
- Very compact : Inlet/Outlet on the same side.
- Integrated level sensor protection against rocks and sand.

PERFORMANCES

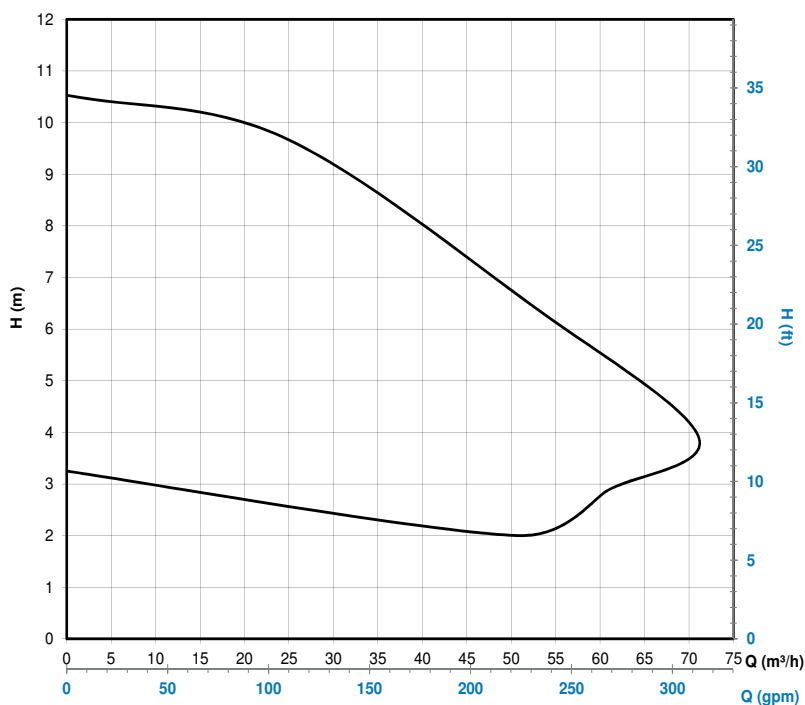

DIMENSIONS IN MM (AND INCHES)

DNA	150 (6")
DNR	100 (4")
H1	380 (15")
H2	462 (18")max
L	854 (33.6")
P1	409 (16")
P2	144 (5.7")
P3	196 (7.7")

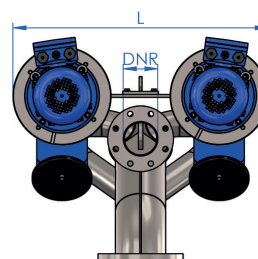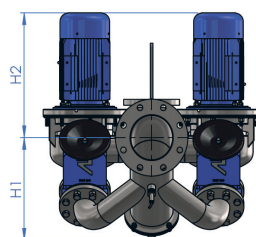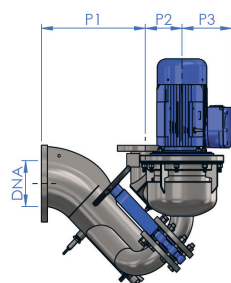

RATED POWER	SPEED (up to)	VOLTAGE	MAX CURRENT	INLET (DNA)	OUTLET (DNR)	ø CHANNEL	WEIGHT
2,2 kW/3HP	1450 rpm	400 V	5,15 A	150 mm (6")	100 mm (4")	80 mm (3")	179 kg / 394 lbs

