

DOMODIP

Direct in-Line
Ready to install
quick to connect
to waste line
(2 possible inlets)


Direct in-Line shredding and
pumping system that is clean,
no more buried tank, and
no more odors

Supplied with
preset electronic
control cabinet
with alarm

Vertical or horizontal
outlet choice

Industrial grade
maintenance free
stainless steel
construction

Sealed, silent and
fully automatic system

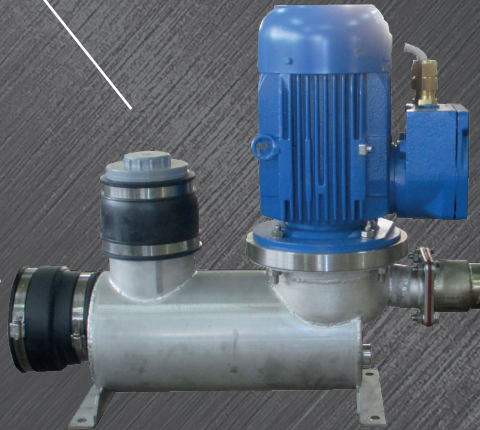

EN




- No odor
- No wet well
- Easy to install
- No float switches
- Easy access
- No cleaning



DomoDIP® : Small stainless steel lift station, **made in France**, for connecting a private residence to Low Pressure Sewer System or to non-collective sanitation.

Domestic wastewater evacuation system that connects to low pressure sewer line, when it is higher than the house, passes by mini-lift station. Instead of classical cumbersome smelly tank, with heavy maintenance and requiring regular cleaning, we suggest the DOMODIP® solution : **a Direct in-Line pumping system without any tank, so no odor, no cleaning and easy maintenance.**

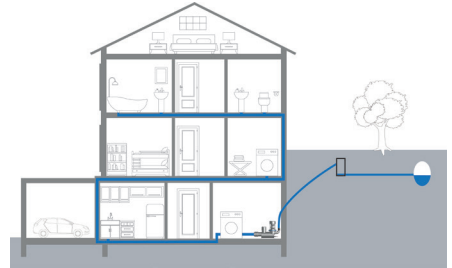

The DomoDIP® systems are designed **to be easily adapted** to different types of installation with **simplified start-up, operating and maintenance.**

It is very easy to install a DomoDIP. Most of the time the installation is made either in basements or garages. Relying on the "Direct-in line pumping" concept, the DOMODIP is lifting gravity effluent directly from effluent downstream without water charging or a collecting tank.

The DomoDIP® system is then odorless and does not require any cleaning. The electronic control unit is designed **to automatically manage settings and provide an alarm should there be a malfunction.**

ADVANTAGES OF DOMODIP®

- Compact installation, DomoDIP® takes very little space.
- Easy and convenient connections. Electrical connection plugs in to a 15A power outlet.
- Easy maintenance, no cleaning (visual check is sufficient and a dry cloth to remove dust if necessary).
- No odor.
- No wet well or tank to be buried, easy access.
- No clogging, no need of float switches, a flush is enough to make the DomoDIP® start, without consuming more energy than a typical grinder station.
- Robust stainless steel equipment (accepts detergents, hot water, wipes, etc.), pumped liquid temperature can be up to 60°C (140°F).
- Very silent system.
- No risk of overflow, DomoDIP® is fully waterproof
- Industrial quality motor (IP67), with standard frame size and is repairable. No plastic parts.
- 3 years warranty.





Robbinsville, NJ
Ph: (609) 208-0660
info@imexconsultinggroup.com
www.imexconsultinggroup.com

www.dipsysteme.com