

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/289308347>

An Introduction to Water Quality Monitoring

Presentation · August 2012

DOI: 10.13140/RG.2.1.1727.4961

CITATIONS

0

READS

671

1 author:



[Ritabrata Roy](#)

National Institute of Technology, Agartala

6 PUBLICATIONS 0 CITATIONS

SEE PROFILE

SCHOOL OF HYDRO-INFORMATICS ENGINEERING

NATIONAL INSTITUTE OF TECHNOLOGY, AGARTALA

WATER QUALITY ANALYSIS : AN INTRODUCTION

What is Water Quality?

Water Quality can be defined as the chemical, physical and biological characteristics of water, usually in respect to its suitability for a designated use.

As we all know, water has many uses, such as for recreation, drinking, fisheries, agriculture and industry. Each of these designated uses has different defined chemical, physical and biological standards necessary to support that use. For example, we expect higher standards for water we drink and swim in compared to that used in agriculture and industry.

What is Water Quality Analysis?

Water quality standards are put in place to ensure the efficient use of water for a designated purpose. Water quality analysis is to measure the required parameters of water, following standard methods, to check whether they are in accordance with the standard.

Why Water Quality Analysis is required?

Water quality analysis is required mainly for monitoring purpose. Some importance of such assessment includes:


1. To check whether the water quality is in compliance with the standards, and hence, suitable or not for the designated use.
2. To monitor the efficiency of a system, working for water quality maintenance
3. To check whether upgradation / change of an existing system is required and to decide what changes should take place.
4. To monitor whether water quality is in compliance with rules and regulations.

Water quality analysis is of extremely necessary in the sectors of:

1. Public Health (especially for drinking water)
2. Industrial Use

Procedures of Water Quality Analysis

The general flow of procedures for water quality analysis is as follows:

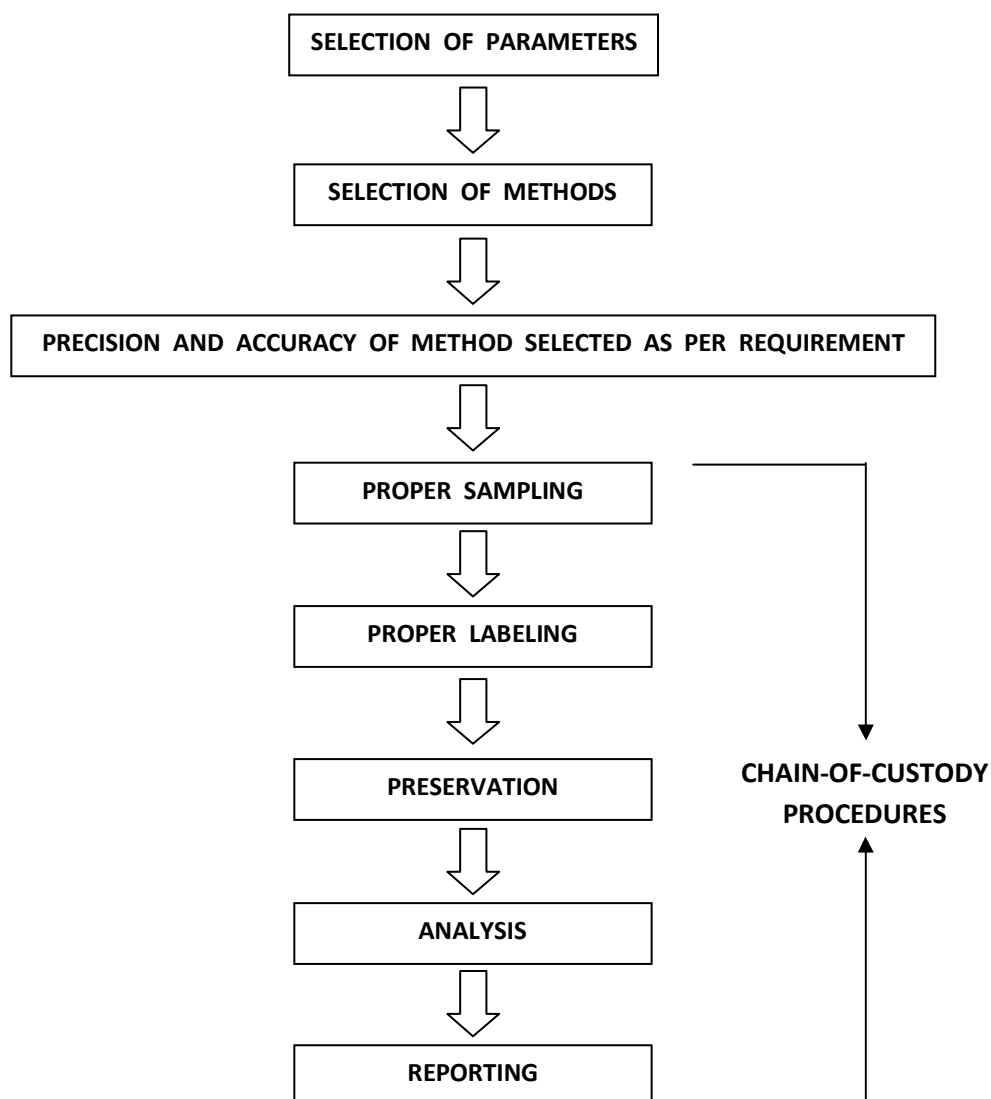


SELECTION OF PARAMETERS

The parameters of water quality are selected entirely according to the need for a specific use of that water. Some examples are:

- **Drinking**
As per WHO/CPCB Standards
- **Irrigation**
pH
Conductivity
Sodium & Potassium
Nutrients
Specific compounds
- **Industries**
As per specific requirement
- **Domestic Consumption**
As per BIS Standards
- **Water Bodies**
As per CPCB guidelines

However, some of the most common parameters followed for checking potability and industrial use in India are as follows:

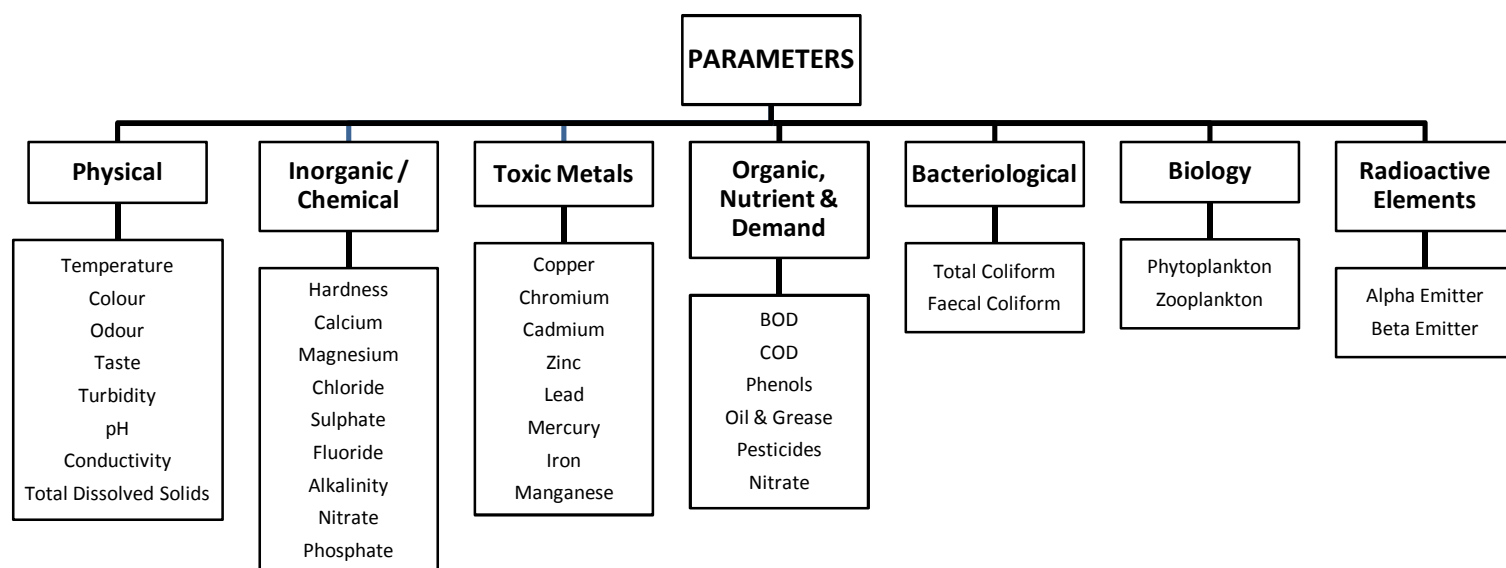

SELECTION OF METHODS

The methods of water quality analysis are selected according to the requirement. The factors playing key role for the selection of methods are:

- (i) Volume and number of sample to be analyzed
- (ii) Cost of analysis
- (iii) Precision required
- (iv) Promptness of the analysis as required

PRECISION AND ACCURACY OF METHOD SELECTED AS PER REQUIREMENT

What precision and accuracy to be maintained against a particular method is selected according to the need. The factors influencing this decision includes:

- (i) Cost
- (ii) Parameter
- (iii) Use

CHAIN-OF-CUSTODY PROCEDURES

Properly designed and executed chain-of-custody forms will ensure sample integrity from collection to data reporting. This includes the ability to trace possession and handling of the sample from the time of collection through analysis and final disposition. This process is referred to as “chain-of-custody” and is required to demonstrate sample control when the control when the data are to be used for regulation or litigation. Where litigation is not involved, chain-of-custody procedures are useful for routine control of samples.

A sample is considered to be under a person's custody if it is in the individual's physical possession, in the individual's sight, secured and tamper-proofed by that individual, or secured in an area restricted to authorized personnel. The following procedures summarize the major aspects of chain-of-custody:

- (i) **Sample labels:** Labels are used to prevent sample misidentification as well as to identify the collector, if required. In other words, labeling ensures the responsibility and accountability of the collector.
- (ii) **Sample seals:** Sample seals are used to detect unauthorized tampering with samples up to the time of analysis. So, it is essential to seal a sample before leaving the custody of the collector. Sealing must be done in such a way as one have break the seal to access the sample.
- (iii) **Field log book:** Record all information pertinent to a field survey or sampling in a bound log Book is a good practice. At least the following data should be in the log book:
 - (a) Purpose of sampling
 - (b) Location of sampling point
 - (c) Name and address of field contact
 - (d) Producer of material being sampled and address, if different from location
 - (e) Type of sample
 - (f) Method, date, and time of preservation.
- (iv) **Sample analysis request sheet:** The sample analysis request sheet accompanies samples to the laboratory. The collector completes the field portion of such a form that includes most of the pertinent information noted in the log book. The laboratory portion of such a form is to be completed by laboratory personnel and includes: name of person receiving the sample, laboratory sample number, date of sample receipt, condition of each sample (i.e., if it is cold or warm, whether the container is full or not, color, if more than one phase is present, etc.) and determinations to be performed.
- (v) **Sample delivery to the laboratory:** Sample(s) should be delivered to laboratory as soon as practicable after collection, typically within 2 days. Where shorter sample holding times are required, special arrangements must be made to insure timely delivery to the laboratory. Where samples are shipped by a commercial carrier, the waybill number to be included in the sample custody documentation. Samples must be accompanied by a complete chain-of-custody record and a sample analysis request sheet.
- (vi) **Receipt and logging of sample:** In the laboratory, the sample custodian inspects the condition and seal of the sample and reconciles label information and seal against the chain-of-custody record before the sample is accepted for analysis. After acceptance, the custodian assigns a laboratory number, logs sample in the laboratory log book and/or computerized laboratory information management system, and stores it in a secured storage room or cabinet or refrigerator at the specified temperature until it is assigned to an analyst.
- (vii) **Assignment of sample for analysis:** The laboratory supervisor usually assigns the sample for analysis. Once the sample is in the laboratory, the supervisor or analyst is responsible for its care and custody.
- (viii) **Disposal:** Samples are held for the prescribed amount and duration for the project or until the data have been reviewed and accepted. Samples are disposed usually after documentation. However, disposal must be in accordance with local, state, and U.S. EPA approved methods.

PROPER SAMPLING

Proper sampling is a vital condition for correct measurement of water quality parameters. Even if advanced techniques and sophisticated tools are used, the parameters can give an incorrect image of the actual scenario due to improper sampling. The proper sampling should fulfill the following criteria:

1. **Representative:** The data must represent the wastewater or environment being sampled. So, the following factors must be well planned for proper sampling:

- (i) Process of Sampling
- (ii) Sampling size/volume
- (iii) Number of Sampling Locations
- (iv) Number of Samples
- (v) Type of Samples
- (vi) Time Intervals

During sampling, these factors must also be taken care of:

- (a) Choosing of proper sampling container
- (b) Avoiding contamination
- (c) Ensure the personal safety of the collector

2. **Reproducible:** The data obtained must be reproducible by others following the same sampling and analytical protocols.

3. **Defensible:** Documentation must be available to validate the sampling procedures. The data must have a known degree of accuracy and precision.

4. **Useful:** The data can be used to meet the objectives of the monitoring plan.

PROPER LABELING

Proper labeling prevents sample misidentification and ensures the responsibility and accountability of the collector. The sample container should be labeled properly, preferably by attaching an appropriately inscribed tag or label. Alternatively, the bottle can be labeled directly with a water-proof marker. Barcode labels are also available nowadays.

Information on the sample container or the tag should include at least:

- (i) Sample code number (identifying location)
- (ii) Date and time of sampling
- (iii) Source and type of sample
- (iv) Pre-treatment or preservation carried out on the sample
- (v) Any special notes for the analyst
- (vi) Sampler's name

PRESERVATION

There is usually a delay between the collection and analysis of a sample. The nature of the sample can be changed during this period. Therefore proper preservation is required in the way to laboratory after collection, and in the laboratory upto when analysis starts.

Complete and unequivocal preservation of samples, whether domestic wastewater, industrial wastes, or natural waters, is a practical impossibility because complete stability for every constituent never can be achieved. At best, preservation techniques only retard chemical (especially, hydrolysis of constituents) and biological changes that inevitably continue after sample collection.

No single method of preservation is entirely satisfactory; the preservative is chosen with due regard to the determinations to be made. Preservation methods are limited to pH control, chemical addition, the use of amber and opaque bottles, refrigeration, filtration, and freezing.

ANALYSIS

The samples, after reaching laboratory, are analyzed, according to the requisite parameters, following standard methods and protocols.

REPORTING

The ultimate procedure of water analysis is to prepare a proper report against the submitted requisition. The report must be authenticated before handing over the authority, submitted the samples for testing. All data should be kept in the laboratory log and preferably in laboratory database.

REFERENCES

1. Guide Manual: Water and Wastewater Analysis; Central Pollution Control Board
2. Water Quality Analysis Laboratory Methods; Dr. Leena Deshpande
3. Wastewater Engineering; Metcalf & Eddy; 2003; Tata McGraw-Hill Publishing Co Ltd